



2021 CATALOG

CONTENT INDEX

04

MGL GROUP

WHO IS MGL.....	04
OUR BRANDS.....	04

06

MEASURING INSTRUMENTS

MULTIMETERS.....	08
CLAMP METERS.....	16
VOLTAGE TESTERS & TESTERS	21
ENVIRONMENTAL TESTERS.....	26
WIRE TESTERS	30
INDUSTRIAL TESTERS.....	34
BUNDLES	35
RANGE COMPLEMENTS	43

44

ENERGY SAVING

MOTION DETECTORS.....	46
SECURITY DETECTORS	48
TIMER SWITCHES	57
USB PLUGS.....	60

62

INSTALLATION

FISH TAPES REEL.....	64
INSULATING GEL	67

WHO IS MGL

We are a global group of companies operating locally. We develop, manufacture and sell products and solutions for the test and measurement industry under our own brands, such as Mastech, KPS, C-LOGIC and Power Probe. We also offer engineering/manufacturing (ODM) and adaptation/customization (OEM) services.

Our companies work globally, serving our customers worldwide. This global network delivers a deeper understanding of each individual market, with solutions tailored to the unique requirements of each customer.

Our goal is to be a recognized, honest and fair company. We aim to be the most valued partner for our customers in the research, development, manufacture and supply of innovative, modern and customer focused technologies.

We have a highly experienced team which is open-minded, receptive to new ideas and adaptive to evolving market trends. This solid foundation guarantees that we are well informed and fully equipped to deliver excellent solutions to meet our customers' real needs.



OUR BRANDS

We manufacture electrical testing and measurement instruments under our own brands: Mastech, KPS, C-Logic and Power Probe, recognized brands and market leaders in the fields of electrical measurement and automotive. All of our products have a professional positioning based on advanced balanced technology and they are marketed through local distributors throughout the world.

We maintain direct and close contact with our distributors, through our offices around the world, and we support them in their business by offering technical advice and after-sales service for our products.

MASTECH®

 **KPS®**

 **C-LOGIC®**

 **POWER PROBE®**

MGL AT A GLANCE



More than 800 employees



Annual production of +10 million units



Three factories in Taiwan, China and Europe



We manufacture more than 95% of our products, including accessories



MEASURING INSTRUMENTS

- MULTIMETERS
- CLAMP METERS
- VOLTAGE TESTERS
- ENVIRONMENTAL TESTERS
- WIRE TESTERS
- INDUSTRIAL TESTERS
- BUNDLES

SYMBOL	DESCRIPTION
	CONTENTS
	1.5V AAA battery
	12V A23S battery
	9V 6F22 battery
	Alligator clips
	Alligator clips & cables
	Carrying bag
	CD box
	Earth probes
	Earth rod
	Hard case
	Instructions
	K-type thermocouple
	Multifunction socket
	Reflective sheet
	RS232 connection (Serial port)
	Test probes
	Test probes
	USB charger
	MAIN APPLICATIONS
	AC current measuring
	AC current measuring
	AC voltage measuring
	Capacitance
	Continuity measuring
	DC current measuring
	DC current measuring

SYMBOL	DESCRIPTION
	AC voltage measuring
	Diode test
	Duty Cycle measuring
	Frequency measuring
	hFE transistor
	Insulation test
	Lux level measuring
	Metal detection
	Power measuring
	Resistance measuring
	Revolutions per minute measuring
	Sound level measuring
	Temperature measuring
	FEATURES
	AC weighting
	Acoustic indicator
	Auto power off
	Auto range
	Average
	Back light display
	Broken cable testing
	Candel measurement
	Continuity test
	Data hold
	Data log
	Dielectric absorption ratio / Polarization index
	Diode test

SYMBOL	DESCRIPTION
	Emissivity
	Foot-Candel measurement
	Inrush current
	Laser
	Light indicator
	Low battery display
	Low Impedance
	Luxes measurement
	Max & min values
	Memory
	Metal detection
	Noise frequency weighting
	Non-Contact voltage
	Over & under range alert
	PC connection
	RCD
	Relative measurement
	Smartphone connectivity
	Timer
	Transistor
	True root mean square
	USB connection
	Valid for Ethernet cable testing
	Valid for LED light measuring
	Valid for telephone cable line testing
	Valid for TV/coaxial cable testing
	Work light



- Pocket format that facilitates product portability.
- Test leads integrated which facilitates its use and storage.



More info

C-LOGIC 55

Digital multimeter
SKU: CLOGIC55CBINT
EAN Code: 8435394775487
UPC Code: 810053670996

SPECIFICATIONS

AC VOLTAGE

300V

DC VOLTAGE

300V

AC CURRENT

200mA

RESISTANCE

2MΩ

DISPLAY COUNTS

2000



FEATURES

Display counts	2000	
Diode	Open Voltage	3.0V
Continuity Buzzer	< 50±20Ω	•
LBD	Low Battery Display	•


General

Power Supply	1×12V A23S Battery included
Product Size	120mmx70mmx18mm/4.7"x2.75"x0.7"
Product Weight	110g/0.23lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT II 600V, CAT III 300V


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box

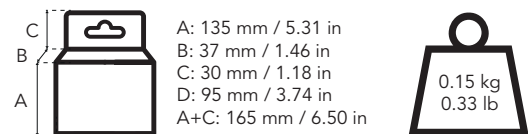

Export carton

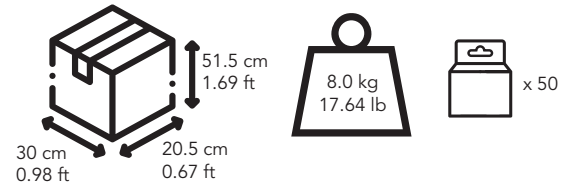

Pallet

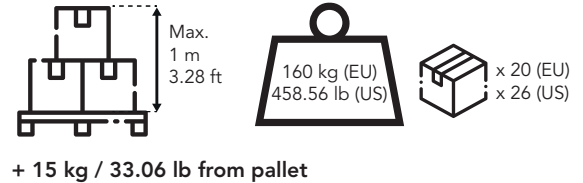


CONTENTS




MAIN APPLICATIONS



DOMESTIC

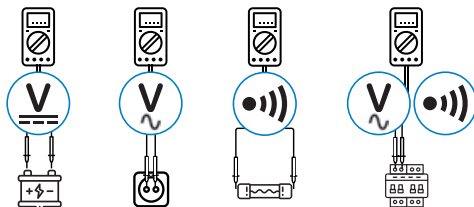

ELECTRONICS

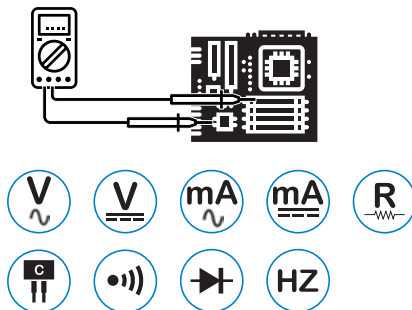



- Rubber housing for better comfort in use.
- Hinged bracket to facilitate table work.
- Resistance, diode, continuity and data hold.



C-LOGIC 520

Digital multimeter
SKU: CLOGIC520CBINT
EAN Code: 8435394775494
UPC Code: 810053670965



More info

SPECIFICATIONS

AC VOLTAGE

600V

DC VOLTAGE

600V

DC CURRENT

10A

RESISTANCE

2MΩ

DISPLAY COUNTS

2000



FEATURES

Display counts		2000
Diode	Open Voltage	3.0V
Continuity Buzzer		<50Ω
Data Hold		●
LBD	Low Battery Display	●
Battery Test	1.5V/9V/12V	●

General


Power Supply	1x9V6F22 NEDA 1604 Battery included
Product Size	148mmx73.5mmx50mm/5.8" x2.9"x1.96"
Product Weight	232g/0.51lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT III 600V

PACKAGING & LOGISTICS INFORMATION



HS Code: 90303200

Check available packaging options.

CONTENTS



MAIN APPLICATIONS

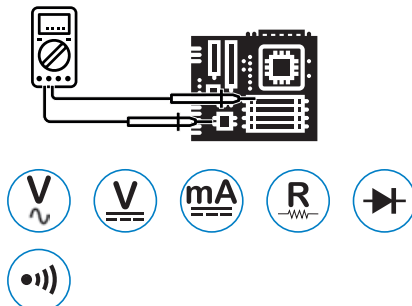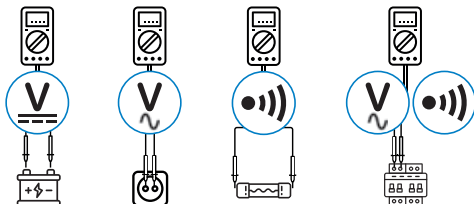



- Rubber housing for better comfort in use.
- Hinged bracket to facilitate bench work.
- AC /DC current ,AC/DC Voltage, capacitance, frequency, temperature and transistor.



More info

C-LOGIC 5100


Digital multimeter

SKU: CLOGIC5100CBINT

EAN Code: 8435394775562

UPC Code: 810053670941


CONTENTS

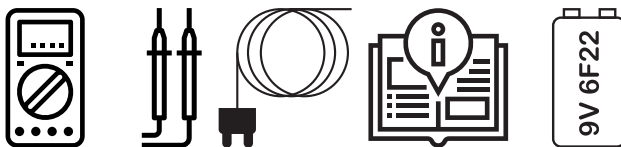


MAIN APPLICATIONS



DOMESTIC

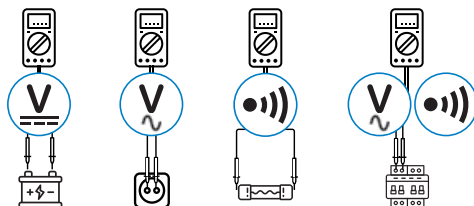

ELECTRONICS

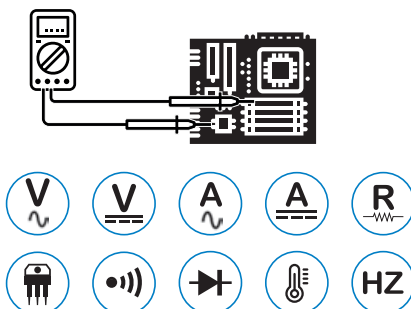

SPECIFICATIONS

AC VOLTAGE

600V

DC VOLTAGE

600V

AC CURRENT

10A

DC CURRENT

10A

RESISTANCE

200MΩ

CAPACITANCE

100μF

FREQUENCY

20kHz

TEMPERATURE

-20°C~1000°C
1°F~1832°C

DISPLAY COUNTS

2000

Apo



H



FEATURES

Display counts	2000
APO	Auto Power OFF
Transistor hFE	0~1000
Diode	Open Voltage
Continuity Buzzer	<50Ω
Data Hold	
LBD	Low Battery Display


General

Power Supply	1x9V 6F22 Battery included
Product Size	188mm x 93mm x 50mm/7.4" x 3.7" x 1.96"
Product Weight	380g/0.84lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT III 600V


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box

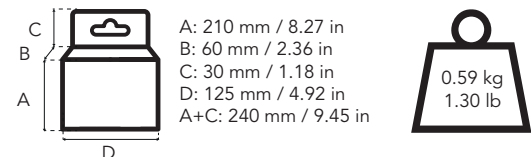

Export carton

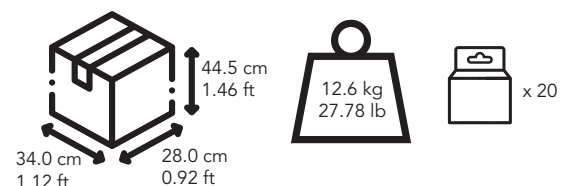

Pallet

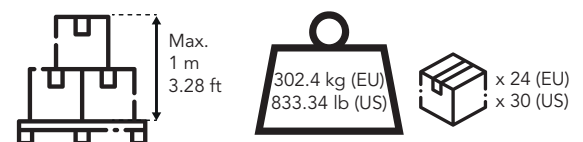

+ 15 kg / 33.06 lb from pallet



- Rubber housing for better comfort in use.
- Hinged bracket to facilitate bench table work.
- Professional reference. Industrial multimeter.



PRO



More info

C-LOGIC 5200

Digital multimeter

SKU: CLOGIC5200CBINT

EAN Code: 8435394775593

UPC Code: 810053671498


CONTENTS




MAIN APPLICATIONS




DOMESTIC

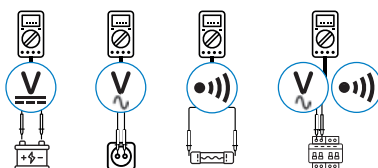

ELECTRONICS



INDUSTRIAL

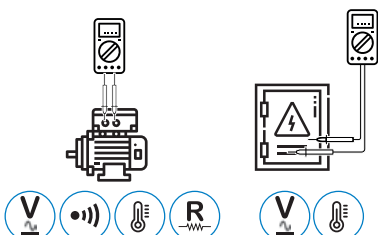

SPECIFICATIONS

AC VOLTAGE
1000V

DC VOLTAGE
1000V

AC CURRENT
10A

DC CURRENT
10A

RESISTANCE
66MΩ

CAPACITANCE
66mF

FREQUENCY
10kHz/66MHz

TEMPERATURE
0°C~1000°C
32°F~1832°F

DUTY CYCLE
1%~99.9%

DISPLAY COUNTS

6600

Apo



MAX MIN

NCV

AUTO

H



FEATURES

Display counts	6600
Auto Ranging	•
Manual Ranging	•
APO	Auto Power OFF
REL	Relative Measurement
NCV	Non-Contact Voltage Detector
Diode	Open Voltage
Continuity Buzzer	<50Ω
MAX/MIN	•
Data Hold	•
LBD	Low Battery Display
Display Backlight	•


General

Power Supply	1x9V 6F22 Battery included
Product Size	175mm x 85mm x 52mm/6.9" x 3.3" x 2.1"
Product Weight	420g/0.92lb
Certificate	RoHS, CE, ETL
Safety Rating	CAT III 1000V / CAT IV 600V


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box

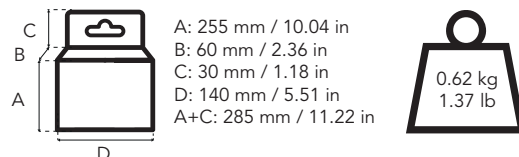

Export carton

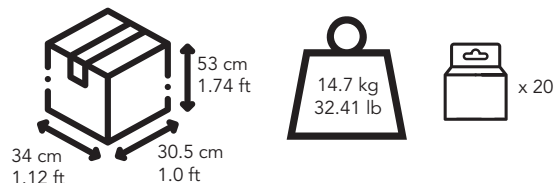

Pallet

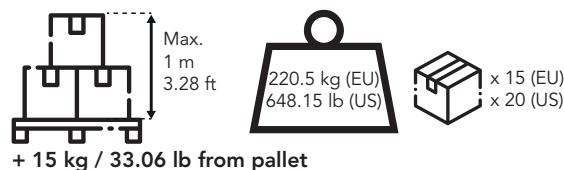



- Industrial range multimeter up to 1000V
- TRMS
- Cat. IV 600V



PRO



More info

C-LOGIC 5600

Digital multimeter

SKU: CLOGIC5600CBINT

EAN Code: 8435394775654

UPC Code: 810053671559


CONTENTS




MAIN APPLICATIONS




DOMESTIC

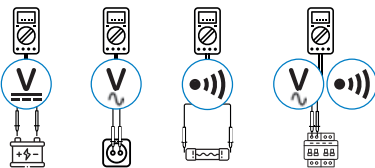

ELECTRONICS



INDUSTRIAL

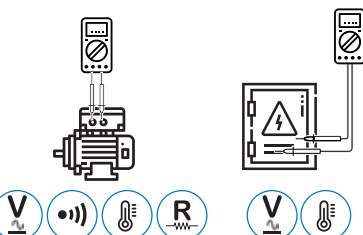

SPECIFICATIONS

AC VOLTAGE
1000V

DC VOLTAGE
1000V

AC CURRENT
10A

DC CURRENT
10A

RESISTANCE
66MΩ

CAPACITANCE
66mF

FREQUENCY
10kHz/66MHz

TEMPERATURE
0°C~1000°C
32°F~1832°F

DUTY CYCLE
1%~99.9%

DISPLAY COUNTS

6600

Apo

Lo-Z

TRMS

MAX MIN

NCV

AUTO

H

•

REL

FEATURES

Display counts		6600
Auto Ranging		●
Manual Ranging		●
REL	Relative Measurement	●
NCV	Non-Contact Voltage Detector	●
Diode	Open Voltage	3.2V
Continuity Buzzer	<50Ω	●
Data Hold		●
LBD	Low Battery Display	●
Display Backlight		●
True RMS	True Root Mean Square	●
Low Z	Low Impedance Input Mode	●


General

Power Supply	1x9V 6F22 Battery included
Product Size	175mm x 85mm x 52mm/6.9" x 3.3" x 2.1"
Product Weight	420g/0.92lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT III 1000V / CAT IV 600V


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box

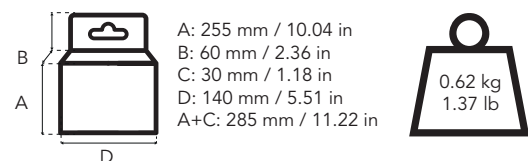

Export carton

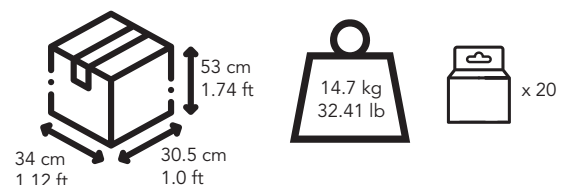

Pallet

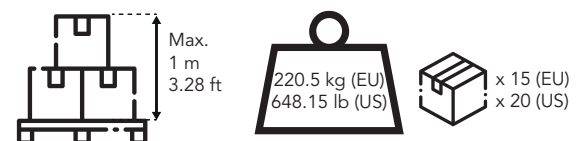

+ 15 kg / 33.06 lb from pallet



- Rubber housing for better comfort in use.
- Hinged bracket to facilitate table work.
- Auto-range, relative, humidity, luminosity and sound level.
- For professional use.



PRO



More info


C-LOGIC 5300

Digital multimeter
SKU: CLOGIC5300CBINT
EAN Code: 8435394775609
UPC Code: 810053671504

CONTENTS



MAIN APPLICATIONS

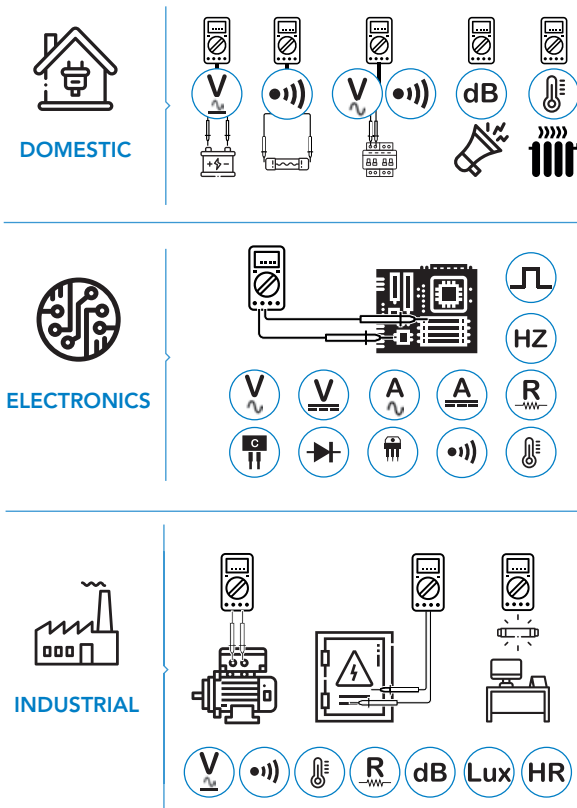

SPECIFICATIONS

AC VOLTAGE 600V	DC VOLTAGE 600V	AC CURRENT 10A
DC CURRENT 10A	RESISTANCE 40MΩ	CAPACITANCE 100μF
FREQUENCY >200kHz	DUTY CYCLE 0.1%~99.9%	SOUND LEVEL 40dB~100dB
LUMINOSITY 4000~40000Lux	REL. HUMIDITY 20%~95%	
TEMPERATURE -20°C~1000°C -4°F~1832°F	ENVIRONMENT 0°C~40°C 32°F~104°F	DISPLAY COUNTS 4000

Apo



H



AUTO

FEATURES

Display counts	4000
Auto Ranging	•
Manual Ranging	•
APO	Auto Power OFF
°C/°F Selection	•
Diode	Open Voltage
Continuity Buzzer	<50Ω±20Ω
Data Hold	•
LBD	Low Battery Display
Display Backlight	•
Sound & Light Warning	For Incorrect insertion of the input plugs (S version only)


General

Power Supply	3x1.5V AAA Battery included
Product Size	195mm x 92mm x 55mm/7.7" x 3.6" x 2.2"
Product Weight	390g/0.86lb
Certificate	RoHS, CE, ETL
Safety Rating	CAT III 600V


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box

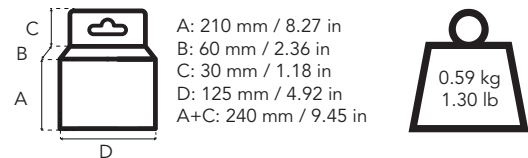

Export carton

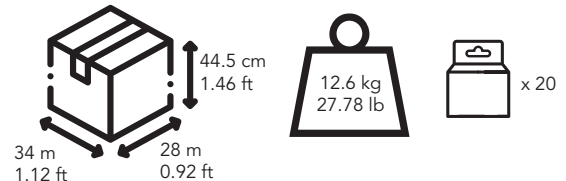

Pallet

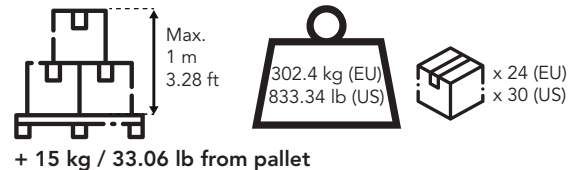



- Smart technology: auto recognition of measured parameters.
- Avoid error in amateur users.
- Save time in pro users.



C-LOGIC 580

Digital multimeter
SKU: CLOGIC580CBINT
EAN Code: 8435394775500
UPC Code: 810053671603

SPECIFICATIONS

AC VOLTAGE

600V

DC VOLTAGE

600V

RESISTANCE

10MΩ

FREQUENCY

3kHz

DUTY CYCLE

10%~90%



DISPLAY COUNTS

6000



MAIN FEATURES

FEATURES

Display counts	6000
Auto range	Auto
APO	Auto Power Off
Dual Display	
Continuity Buzzer	<40Ω
Data hold	
MAX/MIN	
Display Backlight	
LBD	Low Battery Display
NCV	Non-Contact Voltage Detector


General

Power Supply	2×1.5V AAA Batteries included
Product Size	150mm×74mm×48mm/5.9"×2.9"×1.7"
Product Weight	220g/0.48lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT III 600V


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box

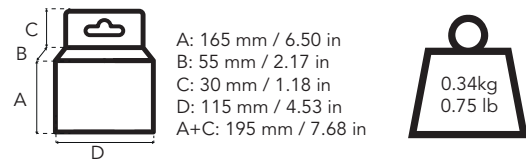

Export carton

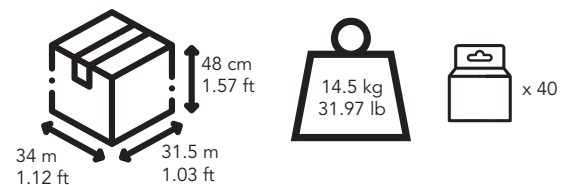

Pallet

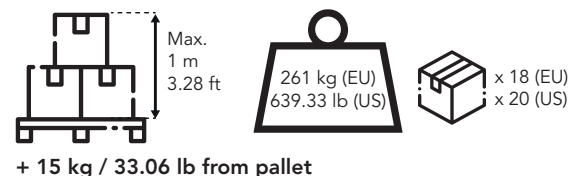


CONTENTS




MAIN APPLICATIONS



DOMESTIC

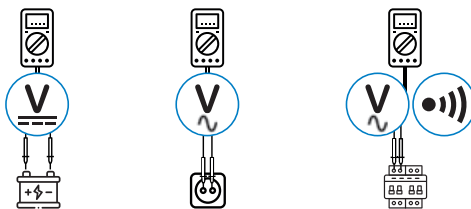

ELECTRONICS

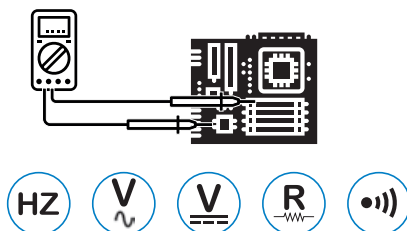



- Smartphone connectivity
- APP allows readings on real time & records
- Rubber housing for better comfort in use.
- Hinged bracket to facilitate bench work.



C-LOGIC 5900

Digital multimeter Smartphone connectivity
SKU: CLOGIC5900CBINT
EAN Code: 8435394775517
UPC Code: 810053671399



More info

SPECIFICATIONS

AC VOLTAGE
600V

DC VOLTAGE
600V

AC CURRENT
10A

DC CURRENT
10A

RESISTANCE
40MΩ

CAPACITANCE
99.99mF

FREQUENCY (A)
>10kHz

FREQUENCY (V)
>1kHz

DUTY CYCLE
0.1%-99.9%

DISPLAY COUNTS

4000

Apo



NCV

AUTO



FEATURES

Display counts	4000
Auto Ranging	•
Manual Ranging	•
APO	Auto Power OFF
True RMS	For AC Voltage & AC Current
Diode	Open Voltage
Continuity Buzzer	<50Ω
Data Hold	•
LBD	Low Battery Display
NCV	Non-Contact Voltage Detector
Battery Tester	1.5V/9V
Wireless	APP connection


General

Power Supply	1×9V 6F22 Battery included
Product Size	188mm×92mm×50mm / 7.4"×3.6"×2.0"
Product Weight	380g/0.83lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT III 600V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200

Carton box




A: 210 mm / 8.27 in
B: 60 mm / 2.36 in
C: 30 mm / 1.18 in
D: 125 mm / 4.92 in
A+C: 240 mm / 9.45 in



0.59 kg
1.30 lb

Export carton





12.6 kg
27.78 lb



x 20

Pallet



302.4 kg (EU)
833.34 lb (US)





x 24 (EU)
x 30 (US)

+ 15 kg / 33.06 lb from pallet

CONTENTS



MAIN APPLICATIONS

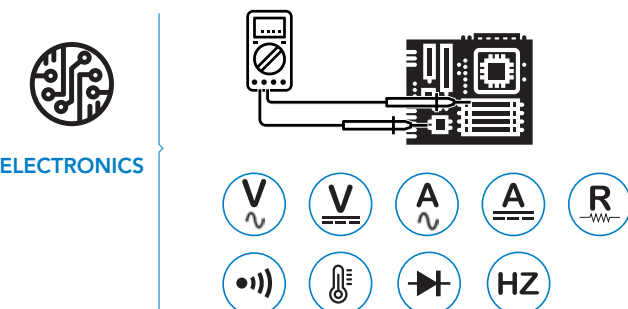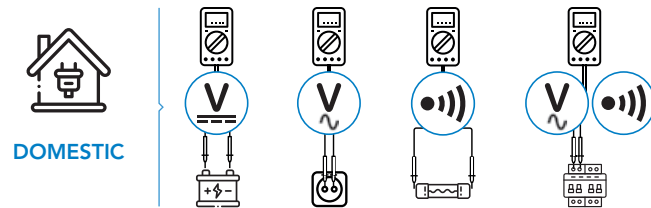



- VDC 1000V/VAC 750. Resistance, frequency, AC 1000, insulation test.
- Jaw size: 1.97"



More info

C-LOGIC 80

AC Clamp meter 100A
SKU: CLOGIC80CBINT
EAN Code: 8435394776712
UPC Code: 810053671184

SPECIFICATIONS

AC VOLTAGE

750V

DC VOLTAGE

1000V

AC CURRENT

1000A

RESISTANCE

20kΩ

INSULATION TEST

2000MΩ

DISPLAY COUNTS

2000



50mm
1.97"



FEATURES

Display counts	2000
Jaw opening Ø	50mm / 1.97"
Continuity Buzzer	<100Ω •
Data Hold	•
LBD	Low Battery Display •


General

Power Supply	1×9V 6F22 Battery included
Product Size	235mm×96mm×46mm / 9.25"×3.8"×1.8"
Product Weight	268g/0.59lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT II 1000V, CAT III 600V


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200

Carton box

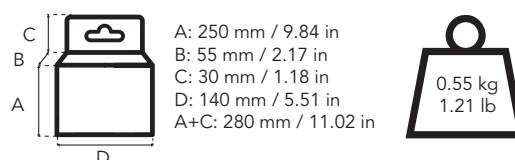

Export carton

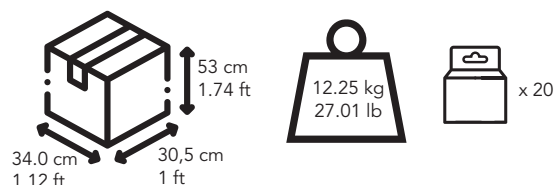



Pallet



CONTENTS



MAIN APPLICATIONS

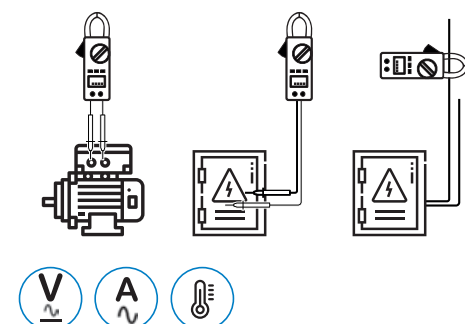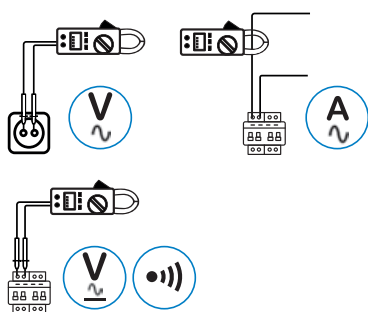



- Small size which facilitates its use and transport
- Jaw size 1.1"



More info

C-LOGIC 85

AC Clamp meter small jaw

SKU: CLOGIC85CBINT

EAN Code: 8435394775524

UPC Code: 810053671160


CONTENTS




MAIN APPLICATIONS



DOMESTIC

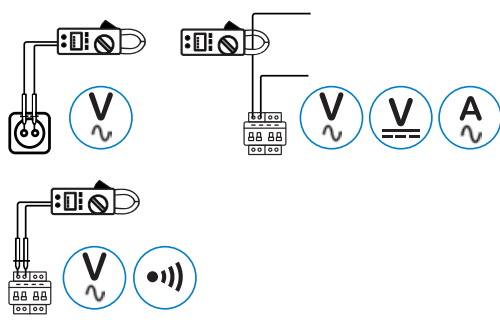

INDUSTRIAL

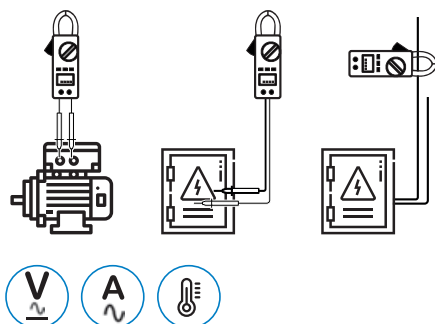

SPECIFICATIONS

AC VOLTAGE

600V

DC VOLTAGE

600V

AC CURRENT

400A

RESISTANCE

2kΩ

DISPLAY COUNTS

2000



28mm
1.1"



FEATURES

Display counts		2000
Jaw Opening		Ø28mm/1.1"
Diode	Open Voltage	4.5V
Continuity Buzzer	<70Ω	●
Data hold		●
LBD	Low Battery Display	●


General

Power Supply	3×1.5V AAA Batteries included
Product Size	198mm×79mm×38mm/7.8"×3.1"×1.5"
Product Weight	195g/0.43lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT III 600V


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200

Carton box

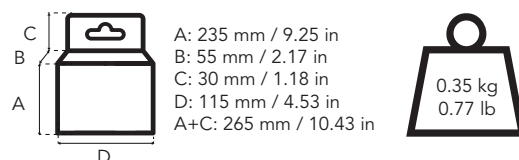

Export carton

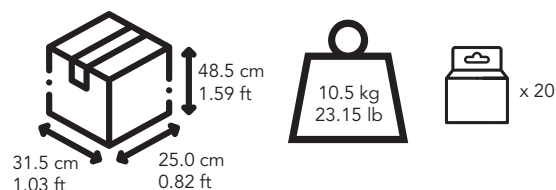


Pallet





- AC/DC Current, allows work with renewable energy.
- Double injection housing which facilitates the grip and handling of the clamp.
- True RMS.



PRO



More info

C-LOGIC 8500

TRMS AC/DC clamp meter 1000A

SKU: CLOGIC8500CBINT

EAN Code: 8435394775531

UPC Code: 810053671283


CONTENTS




MAIN APPLICATIONS



DOMESTIC

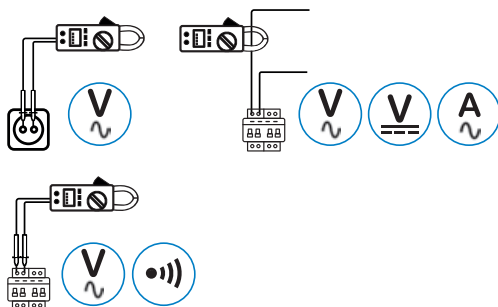

INDUSTRIAL

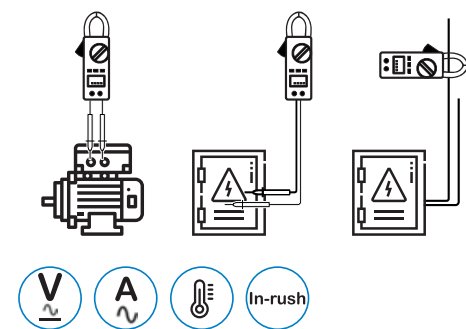

SPECIFICATIONS

AC VOLTAGE
750V

DC VOLTAGE
1000V

AC CURRENT
1000A

DC CURRENT
1000A

INRUSH CURRENT
1000A

RESISTANCE
60MΩ

CAPACITANCE
100mF

FREQUENCY (A/V)
1000Hz/10kHz

FREQUENCY (Hz/Duty)
10MHz

DUTY CYCLE
0.1%~99.9%

DISPLAY COUNTS
6000

40mm
1.58"

TRMS



H

Apo



NCV

INRUSH

FEATURES

Auto Ranging		•
Manual Ranging		•
APO	Auto Power OFF	•
REL	Relative Measurement	•
Diode	Open Voltage	3.2V
Continuity Buzzer	<50Ω	•
Data Hold		•
MAX/MIN		•
LBD	Low Battery Display	•
True RMS	True Root Mean Square	•
Display Backlight		•
Work light		•
Inrush	Inrush Current Measurement	•


General

Power Supply	1×9V 6F22 Battery included
Product Size	238mm×92mm×50mm/9.37"×3.6"×1.9"
Product Weight	386g/0.85lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT III 1000. CAT IV 600V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box




A: 235 mm / 9.25 in
B: 60 mm / 2.36 in
C: 30 mm / 1.18 in
D: 140 mm / 5.51 in
A+C: 185 mm / 7.28 in



Export carton



Pallet



+ 15 kg / 33.06 lb from pallet



- Double injection housing, which facilitates the grip and handling of the clamp.
- Temperature.
- Work light, Non Contact Voltage (NCV).



More info

C-LOGIC 810

AC clamp meter 600A

SKU: CLOGIC810CBINT

EAN Code: 8435394775616

UPC Code: 810053671191


CONTENTS




MAIN APPLICATIONS



DOMESTIC

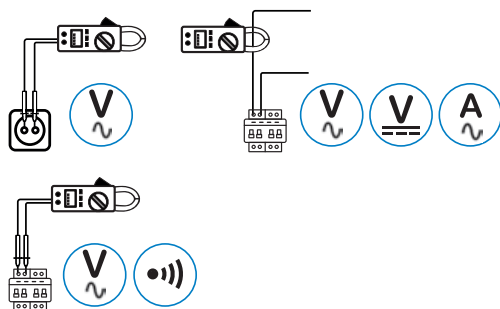

INDUSTRIAL

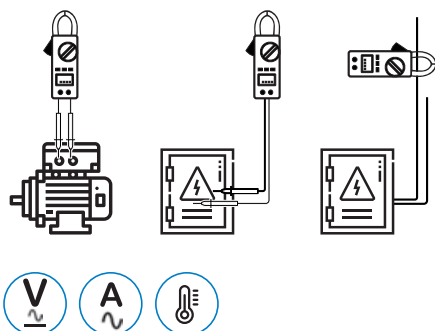

SPECIFICATIONS

AC VOLTAGE
600V

DC VOLTAGE
600V

AC CURRENT
600A

RESISTANCE
60MΩ

CAPACITANCE
60mF

FREQUENCY (A)
1kHz

FREQUENCY (V)
10kHz

FREQUENCY (Hz/Duty)
10MHz

DUTY CYCLE
0.5%~99.9%

TEMPERATURE
-20°C~1000°C
-4°F~1832°F

DISPLAY COUNTS
6000

26mm
1.02"



FEATURES

Display counts	6000
Jaw opening	Ø26mm/1.02"
Auto Ranging	•
Manual Ranging	•
APO	Auto Power OFF
NCV	Non-Contact Voltage Detector
Diode	Open Voltage
Continuity Buzzer	<60Ω
Data Hold	•
Display Backlight	•
Work light	•
LBD	Low battery display


General

Power Supply	3×1.5V AAA Batteries included
Product Size	218mm×78mm×35mm/8.9"×3.1"×1.4"
Product Weight	239g/0.53lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT III 600V


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box

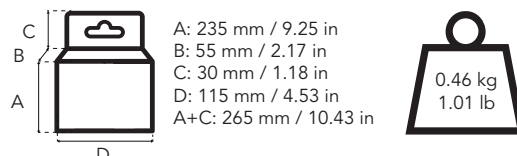

Export carton

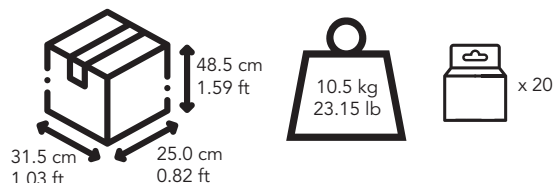

Pallet

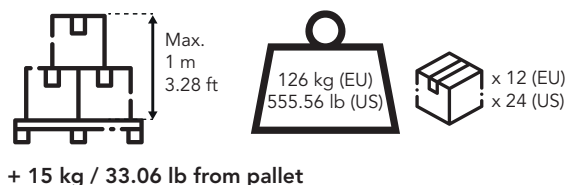



- Double injection housing, which facilitates the grip and handling of the clamp.
- True RMS.
- Professional reference, leakage clamp meter.



PRO



More info

C-LOGIC 8730

Leakage clamp meter with low-pass filter
 SKU: CLOGIC8730CBINT
 EAN Code: 8435394775623
 UPC Code: 810053671542

SPECIFICATIONSAC VOLTAGE
600VDC VOLTAGE
600VAC CURRENT
150ARESISTANCE
40MΩCAPACITANCE
40mFTEMPERATURE
-20°C~1000°C
-4°F~1832°FDISPLAY COUNTS
4000
 30mm
1.18"

TRMS

MAX
MIN

Apo

AUTO



H

FEATURES


Display counts	4000
Jaw opening	Ø30mm/1.18"
Auto Ranging	Auto
APO	Auto Power OFF
True RMS	For AC Voltage
LPF	Low Pass Filter Function (50/60Hz)
Zero	Zero Adjustment
MAX/MIN	
Diode	Open Voltage 3.2V
Continuity Buzzer	<40Ω
Data Hold	
LBD	Low Battery Display

General



Power Supply	2×1.5V AAA Batteries included
Product Size	213mm×62mm×38mm/8.39"×2.44"×1.5"
Product Weight	238g/0.52lb
Certificate	RoHS, CE, ETL
Safety Rating	CAT III 600V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200

Carton box

A: 235 mm / 9.25 in
 B: 60 mm / 2.36 in
 C: 30 mm / 1.18 in
 D: 140 mm / 5.51 in
 A+C: 185 mm / 7.28 in

**Export carton****Pallet**


Max.
1 m
3.28 ft




+ 15 kg / 33.06 lb from pallet

CONTENTS**MAIN APPLICATIONS**

DOMESTIC



INDUSTRIAL

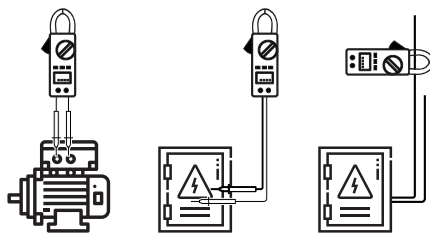



- Rubber housing for better comfort in use.
- Pen type.



C-LOGIC 3200

Pen-type digital multimeter
SKU: CLOGIC3200CBINT
EAN Code: 8435394775630
UPC Code: 810053670798



More info

SPECIFICATIONS

AC VOLTAGE
600V

DC VOLTAGE
600V

AC CURRENT
200mA

DC CURRENT
200mA

RESISTANCE
20MΩ

DISPLAY COUNTS

2000

MAX



Apo

AUTO

H



NCV

FEATURES

Display counts	2000
Auto Ranging	Auto
APO	Auto Power OFF
NCV	Non-Contact AC Voltage Detector Detection: >50V AC
Zero	Zero Adjustment
Logic Level test	0~1.5V (Green LED On) 1.5~3.5V (Green & Red LED On) 3.5~5V (Red LED On)
Diode	Open Voltage
Continuity Buzzer	<50Ω
MAX	Maximum Value Hold
Data Hold	
LBD	Low Battery Display
Housing	Double Molding


General

Power Supply	2×1.5V AAA Batteries included
Product Size	238mm×43mm×29mm/9.37"×1.7"×1.1"
Product Weight	112g/0.28lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT III 600V


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box

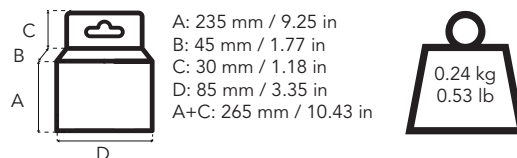

Export carton

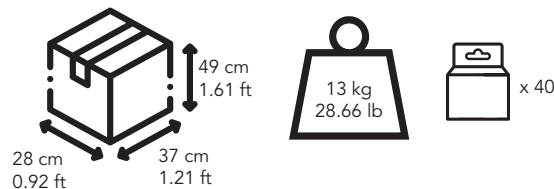


Pallet

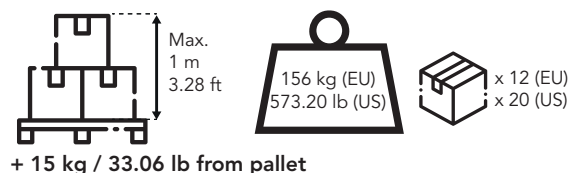

CONTENTS



MAIN APPLICATIONS

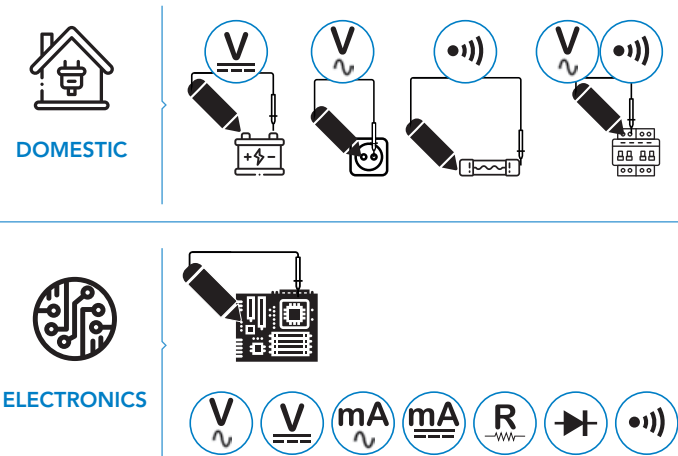



- Pen type which facilitates product portability.
- Metal detection.
- Sound and light alerts.



C-LOGIC 35

Adjustable non contact AC voltage tester
SKU: CLOGIC35CBINT
EAN Code: 8435394747903
UPC Code: 810053670859



More info

SPECIFICATIONS

AC VOLTAGE
20-1000V



FEATURES

Frequency	50Hz~500Hz
Sound and light Indication	•
Red and Green LED Light	•
Double Molded Case	•
Metal Detecting Distance	<0.787"
AC Voltage Sensitivity adjustment	•
Memory Sensitivity function	•
Auto Power Off	•
Low Battery Indication	•
Operating Temperature	-14°F~122°F


General

Storage Temperature	-4°F~140°F
Humidity	<85%RH
Altitude	<2000m / <6561.68ft
Product size	157mm×24mm×20 mm 6.18"×0.94"×0.78"
Product weight	42g/0.09lb
Certificate	CE/ETL/RoHs
Safety rating	CAT II 1000V/CAT III 600V
Power supply	2×12V A23S included

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box




A: 160 mm / 6.30 in
B: 40 mm / 1.57 in
C: 30 mm / 1.18 in
D: 50 mm / 1.97 in
A+C: 190 mm / 7.48 in



Export carton



Pallet



+ 15 kg / 33.06 lb from pallet


CONTENTS



MAIN APPLICATIONS



DOMESTIC

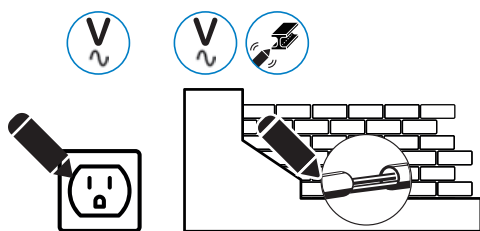

INDUSTRIAL





- Non contact voltage tester 1.000V
- Pen type.



C-LOGIC 25

Voltage Tester up to 1000V
SKU: CLOGIC25CBINT
EAN Code: 8435394777290
UPC Code: 810053673331



More info

SPECIFICATIONS

AC VOLTAGE
90-1000Vac

FREQUENCY
50/60Hz



FEATURES

Voltage Range	90-1000V AC	
Frequency		50/60HZ
NCV	Non-Contact AC Voltage Detector	
Sound & LED indicator		


General

Power Supply	2 x1.5V AAA
Product Size	148 x 17 x 26 mm 5.82"x 0.66" x 1.02"
Product Weight	23 gr./0.05lb (without batteries)
Certificate	CE
Safety Rating	CAT II 1000V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200



Carton box





A: 152 mm / 5.98 in
B: 32 mm / 1.25 in
C: 23 mm / 0.9 in
A+C: 175 mm / 6.88 in



Export carton



Pallet



+ 15 kg / 33.06 lb from pallet


CONTENTS



MAIN APPLICATIONS



DOMESTIC

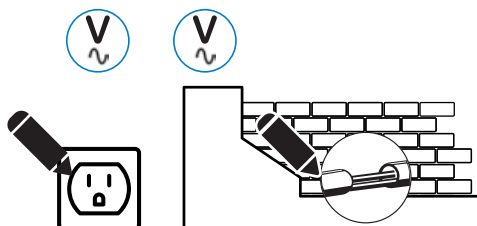

INDUSTRIAL





- Ergonomic design that facilitates its use
- Rubber housing for better comfort in use.
- Small size, ideal for transport.



C-LOGIC 350

Two pole voltage tester
SKU: CLOGIC350CBINT
EAN Code: 8435394747910
UPC Code: 810053671290



More info

SPECIFICATIONS

AC VOLTAGE
12-24-50-120-230-400V

FREQUENCY
50Hz/60Hz

ACCURACY
-30%~0%
of indication



FEATURES

Altitude	<2000m / 6561.68ft
Operation time	Maximum 30s
Recovery time	10 minutes
Relative humidity	<80%RH
Temperature range	-10~55°C/14~131°F


General

Power Supply	N/A
Product Size	223mmx40mmx32 mm/8.78"x1.57"x1.26"
Product Weight	98.5g/0.26lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT III 400V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box





A: 240 mm / 9.45 in
B: 40 mm / 1.57 in
C: 30 mm / 1.18 in
D: 55 mm / 2.17 in
A+C: 270 mm / 10.63 in



Export carton



Pallet



+ 15 kg / 33.06 lb from pallet


CONTENTS



MAIN APPLICATIONS



DOMESTIC



INDUSTRIAL





- 110~120VAC outlet tester
- Indication of disconnected poles L,N,E
- Sound and light led indicators



C-LOGIC 380US

Socket tester
SKU: CLOGIC380USCBINT
EAN Code: 8435394776729
UPC Code: 810053670897



More info

SPECIFICATIONS

AC VOLTAGE
110~120VAC



Specifications

Voltage Range 110~120VAC

LED indication of the socket's wiring

- Correct
- Missing Earth
- Live-Earth reverse
- Live-Neutral reverse
- Missing Neutral

General

Product Size 68mm×60mm×56mm/2.67"×2.36"×2.2"

Product Weight 60g/0.13lb

Certificate RoHs, CE, ETL


Safety Rating CAT II 230V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90318000

HS Code (UK): 90303200


Carton box

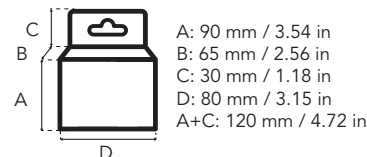



A: 90 mm / 3.54 in
B: 65 mm / 2.56 in
C: 30 mm / 1.18 in
D: 80 mm / 3.15 in
A+C: 120 mm / 4.72 in



Export carton



Pallet



+ 15 kg / 33.06 lb from pallet

CONTENTS




AVAILABLE SOCKETS



MAIN APPLICATIONS



DOMESTIC



TONE	
ON	CORRECT
o) PULSE	MISSING EARTH
o) PULSE	LIVE EARTH REVERSE
o) PULSE	LIVE NEUTRAL REVERSE
o) PULSE	MISSING NEUTRAL



- Rubber housing for better comfort in use.
- Works with LED.
- Professional reference.



PRO



More info

C-LOGIC 250

Digital light meter

SKU: CLOGIC250CBINT




EAN Code: 8435394747958

UPC Code: 810053671511

CONTENTS



MAIN APPLICATIONS



SPECIFICATIONS

LUX

20.000

DISPLAY COUNTS

2000

H

REL

Apo

MAX
MIN

Lux

CD

FC

OK Led

FEATURES

Display counts	2000
Auto Ranging	•
Manual Ranging	•
APO	Auto Power OFF
MAX/MIN	•
REL	Relative Measurement
PEAK	Peak Measurement
ZERO	Zero Calibration
FC / Lux	FC / Lux / Unit Selection
Data Hold	•
Analog Bar	Analog Bar Indication
LBD	Low Battery Display


General

Power supply	1×9V 6F22 Battery included
Product size	170mm×89mm×43mm/6.7"×3.5"×1.7"
Product weight	420g/0.93lb
Certificate	RoHs, CE, ETL

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200



Carton box




A: 190 mm / 7.48 in
B: 60 mm / 2.36 in
C: 30 mm / 1.18 in
D: 110 mm / 4.33 in
A+C: 220 mm / 8.66 in



Export carton



Pallet



+ 15 kg / 33.06 lb from pallet



- Rubber housing for better comfort in use.
- Small size ideal for transport.
- Temperature range up to 572°F.
- Data hold.



PRO



More info


C-LOGIC 230

Infrared thermometer
SKU: CLOGIC230CBINT
EAN Code: 8435394775848
UPC Code: 810053670002

CONTENTS



MAIN APPLICATIONS

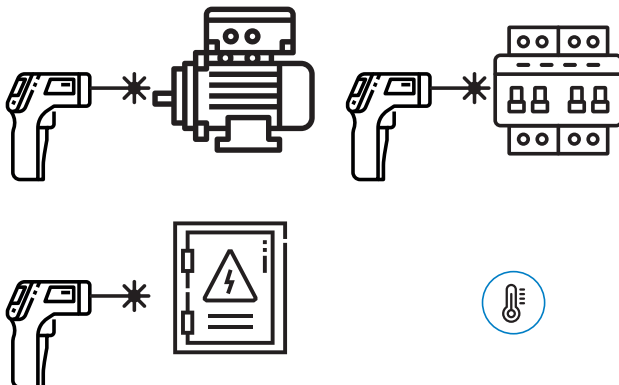

SPECIFICATIONS

TEMPERATURE
-20°C~300°C
-4°F~572°F

REL. HUMIDITY
10%~90%

RESOLUTION
0.1°C/0.2°F



MAX
MIN

H



E=0.95

FEATURES

Spectral Response	8-14 μm	•
Laser	<1mW / 630-670nm	•
°C/°F Selection		•
Response time	1 second	•
Relative Humidity	10%~90%	•
Laser Target Pointer		•
Reading Hold		•
MAX		•
MIN/AVG		•
Display Backlight		•
LBD	Low Battery Display	•


General

Power supply	2x1.5V AAA Batteries included
Product size	148mmx90mmx50mm/5.8"x3.54"x1.96"
Product weight	135g/0.3lb
Certificate	RoHs, CE, ETL


PACKAGING & LOGISTICS INFORMATION

HS Code: 90251900

Carton box

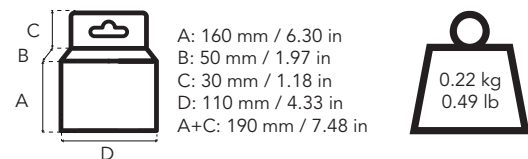

Export carton

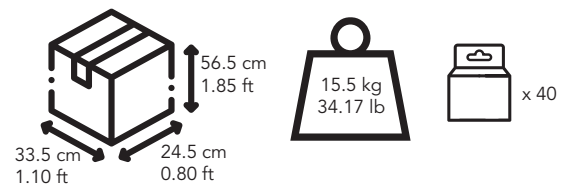

Pallet





- Rubber housing for better comfort in use.
- 131.2 ft/s, Temperature, HR%
- Professional reference.



PRO



More info

C-LOGIC 280

Anemometer

SKU: CLOGIC280CBINT


EAN Code: 8435394747941

UPC Code: 810053671306

CONTENTS



MAIN APPLICATIONS

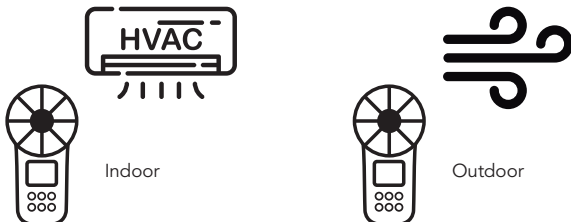

SPECIFICATIONS

Air speed (m/s)
40.00

Air speed (km/h)
144.0

Air speed (ft/s)
131.2

Air speed (mile/h)
90.00

Air speed (ft/min)
7874

Air speed (knots)
77.70

TEMPERATURE
-10°C~60°C
14°F~140°F

RELATIVE HUMIDITY
<20%~>80%

DISPLAY COUNTS
9999

Apo

MAX
MIN

FEATURES

	Range	Area	
Air Volume Unit	CFM: 0~999.9	0~9.999 ft²	•
	CMM: 0~999.9	0~9.999 m²	•
	CFS: 0~999.9	0~9.999 m²	•
Display counts	9999		
Flow Area Setting	•		
MAX/MIN	•		
Data Hold	•		
Display Backlight	•		
LBD	Low Battery Display	•	


General

Power supply	1×9V 6F22 Battery included
Product size	165mm×85mm×38mm/6.5"×3.3"×1.5"
Product weight	168g/0.37lb
Certificate	RoHs, CE, ETL


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box

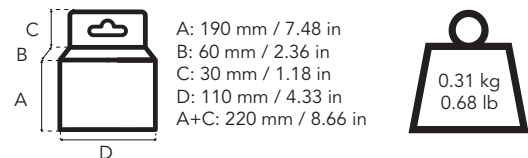

Export carton

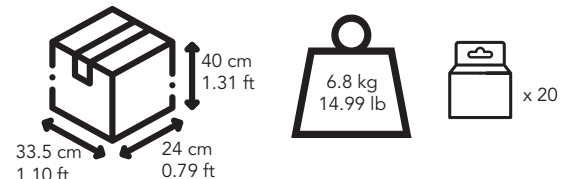

Pallet

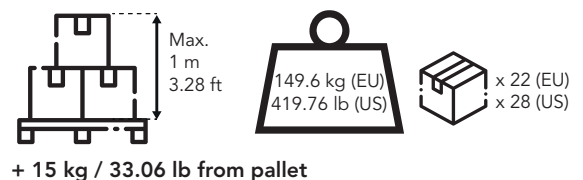



- Rubber housing for better comfort in use.
- Up to 130dB.
- Categories A/C.
- Professional reference.



PRO



More info

C-LOGIC 290

Sound level meter

SKU: CLOGIC290CBINT


EAN Code: 8435394747965

UPC Code: 810053671528

CONTENTS



MAIN APPLICATIONS

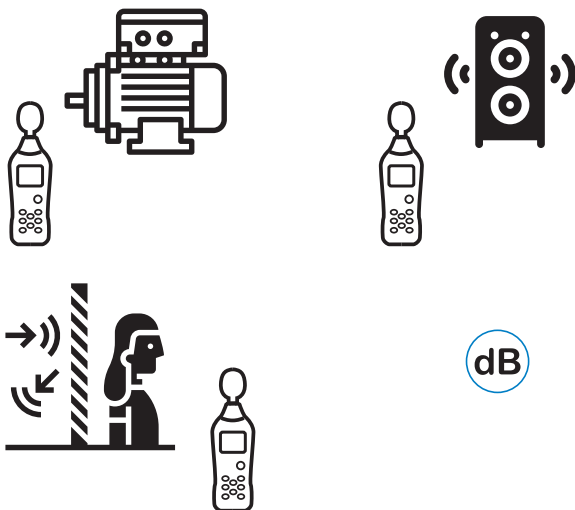

SPECIFICATIONS

SOUND PRESSURE

30dB~130dB

DISPLAY COUNTS

2000

Apo

MAX

H

OVER
UNDER

A/C
WEIGHTING


FEATURES

Display counts		2000
Auto Ranging	Auto & Manual	●
APO	Auto Power Off	●
Dynamic	50dB	●
Frequency	30Hz~8kHz	●
Sample Rate	2 times/second	●
Fast/Slow	125ms/1 sec	●
A/C Weighting		●
Display Backlight		●
LBD	Low Battery Display	●
Analog Bar	Analog Bar Indication	●
UNDER/OVER	Over Range Indication	●


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box

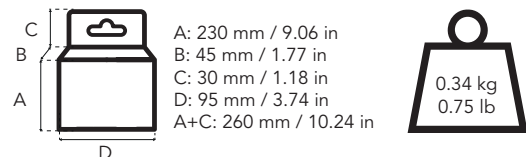

Export carton

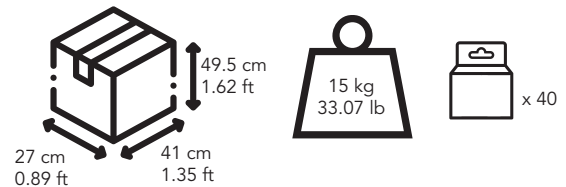

Pallet

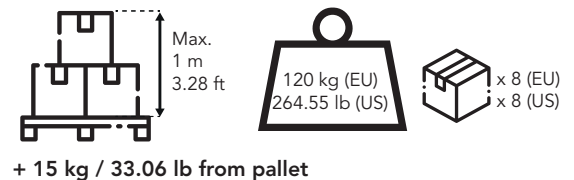



- Allows for easy AC current measurements.
- Separates Live conductor from the neutral and ground.
- Include terminals for voltage measurements.
- Compatible with Schuko.



C-LOGIC 370US

AC Line splitter
SKU: CLOGIC370USCBINT
EAN Code: 8435394776736
UPC Code: 810053670880



More info

SPECIFICATIONS

AC VOLTAGE
110~120VAC

AC CURRENT
15A

X1 - X10
AC CURRENT

FEATURES

- Allows for easy AC current measurements
- Provides the ability to safely measure current
- Separates de Hot/Live conductor from the neutral and ground
- Voltage check sockets for easy power calculations

General

Product size 200mm×57mm×48mm/7.8"×2.2"×2.9"

Product weight 140g/0.3lb


Certificate RoHs, CE

Safety rating CAT II 600V


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box

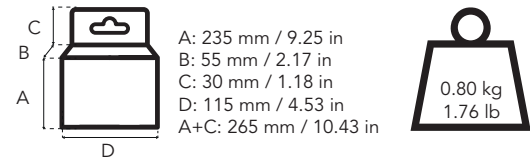

Export carton

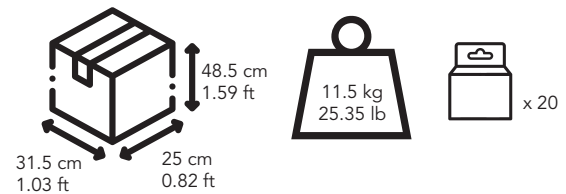

Pallet

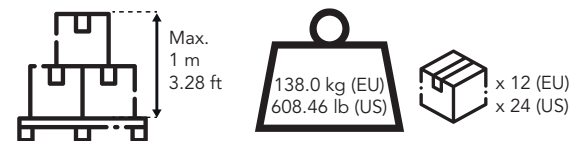

+ 15 kg / 33.06 lb from pallet


CONTENTS



AVAILABLE SOCKETS



MAIN APPLICATIONS

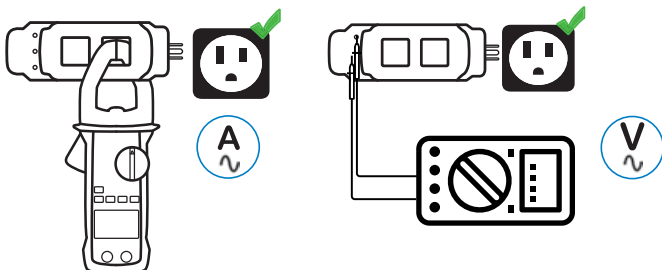



- Multifunction.
- Rubber housing for better comfort in use.
- Small size ideal for transport.
- RJ11, RJ45 and coaxial cables.
- Cable tester and tracker.
- State of the telephone lines.



PRO



More info

C-LOGIC 3400

Multifunction cable tracker
SKU: CLOGIC3400CBINT
EAN Code: 8435394775647
UPC Code: 810053670842

CONTENTS



MAIN APPLICATIONS

Cable error tracking

SHORT



MISWIRE



REVERSED



SPLIT PAIRS



Applications

Testing RJ45 cable

Testing RJ11 cable

Testing Coaxial Cable (BNC)

Twisted-wire-pair cables (RJ45): 10Base-T, T568, T568, Token Ring

Testing Cable's Shield Integrity

Judge Continuity of the Cables or Wires

Track the cables or wire, and diagnose the break Point

Receive the tone signal on the cables or wires (telephone line)

Identify the state in the working telephone line (clear, ringing, busy)

Send a Single Solid or a Dual Alternating Tone to the Target Cables or Wires

FEATURES

Send tone frequency: 1-5kHz

Receive frequency: 100Hz~300kHz

General

Power supply 2×9V 6F22 included

Product size 206mm×84mm×55mm/8.1"×3.3"×2.1"


Product weight 330g/0.72lb

Certificate CE/ETL/RoHs

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200



Carton box




A: 255 mm / 10.04 in
B: 60 mm / 2.36 in
C: 30 mm / 1.18 in
D: 140 mm / 5.51 in
A+C: 285 mm / 11.22 in



Export carton

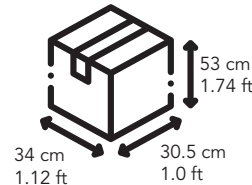

Pallet



+ 15 kg / 33.06 lb from pallet



- Socket tester and circuit breaker finder.
- Sound and light signals
- Professional reference.



PRO



More info

C-LOGIC 3600US

Circuit breaker finder
SKU: CLOGIC3600USCBINT
EAN Code: 8435394776743
UPC Code: 810053670873


CONTENTS




AVAILABLE SOCKETS



MAIN APPLICATIONS



TONE				
ON	●	●	●	CORRECT
o) PULSE	●	●	●	MISSING EARTH
o) PULSE	●	●	●	LIVE EARTH REVERSE
o) PULSE	●	●	●	LIVE NEUTRAL REVERSE
o) PULSE	●	●	●	MISSING NEUTRAL

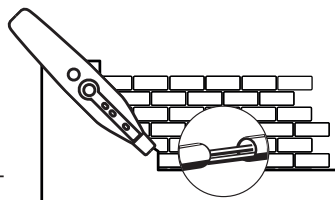

SPECIFICATIONS

AC VOLTAGE

110~120VAC

SOCKET TEST

FEATURES

AC Voltage Range	110~120VAC
Socket Test	206mm×84mm×55mm/8.1"×3.3"×2.1"
Receiver + Transmitter	Quickly and easily identify the breaker connected to a specific socket
Transmitter (Socket Tester Mode) LED indication of the socket's wiring	Correct Missing earth Live-earth reverse Live-neutral reverse Missing neutral
Receiver	Work Light at the Head Points to the Target Area. Low Battery Indication Buzzer and LED instructions


General

Power Supply	1x9V 6F22 Battery	
Product Size	Receiver	198x40x50mm 7.8"x1.57"x1.97"
	Transmitter	71x64x55mm 2.8"x2.5"x2.16"
Product Weight	Receiver	126g/0.28lb
	Transmitter	60g/0.13lb
Certification	Receiver + Transmitter	CE/ETL/RoHs
Safety Rating		CAT II 600V


PACKAGING & LOGISTICS INFORMATION

HS Code (EU): 90318000
HS Code (UK/US): 90303200


Carton box

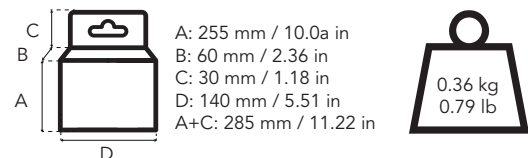

Export carton

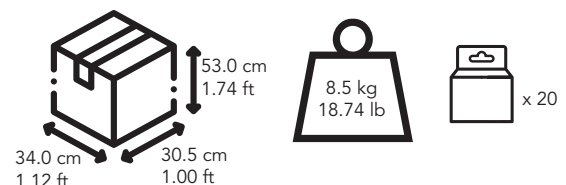

Pallet

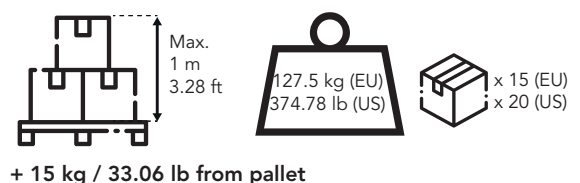



- Advance wire tester.
- Find the Breaks or Shorts in Cable in the wall or Earth,
- Track Cables in the wall or Earth.
- Find the Fuse and Safeguard.
- Find the Breaks or Shorts in Conduit under the Floor.
- Track a Metal Conduit in the Project of ware or hot.

- Sensitivity of transmitter or receiver can be selected.



PRO



C-LOGIC 3900

Advanced cable locator

SKU:


EAN Code: 8435394775678

UPC Code: 810053671382




More info

CONTENTS



MAIN APPLICATIONS

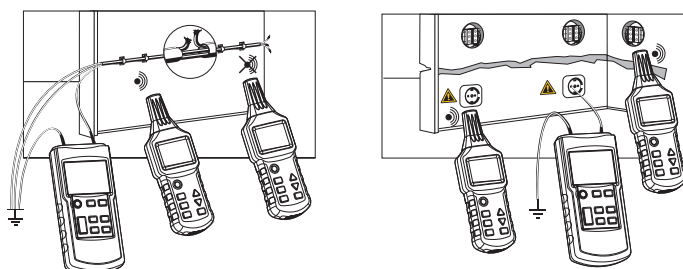

Technical Parameters of Transmitter

Output Signal	125kHz
External Voltage	DC12~400V AC12~400V(50~60Hz) $\pm 2.5\%$
Fuse	F0.5A 1000V
MIN Current	about 31mA
MAX Current	about 115mA
In Work	0~40°. with MAX relative humidity of 80%
In Storage	-20~60°. with MAX relative humidity of 80%
Altitude	<2000m
Product Size	190mm×89mm×42.5mm/7.48"×3.5"×1.67"
Product Weight	420g/0.92lb
Power Supply	1×9V 6F22 Battery

Technical Parameters of Receiver

Depth of Tracking	The depth of tracking depends on the material and specific applications
Cable	Single pole application: about 0~2m
Locating	Dual pole application: about 0~0.5m
Mode	Single loop line: Up to 2.5m
MIN Current	about 32mA
MAX Current	about 89mA
In Work	0~40°. with MAX relative humidity of 80%
In Storage	-20~60°. with MAX relative humidity of 80%
Altitude	<2000m
Product Size	241.5mm×78mm×38.5mm/9.5"×3"×1.5"
Product Weight	350g/0.77lb
Power Supply	6×1.5V AAA Battery


General

Certificate	CE, RoHs, ETL
Safety rating	CAT III 300V


PACKAGING & LOGISTICS INFORMATION

HS Code.: 8445


Carton box

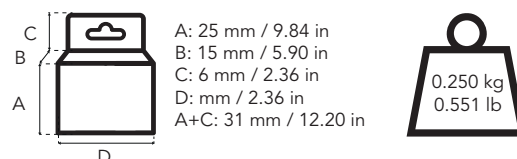

Export carton

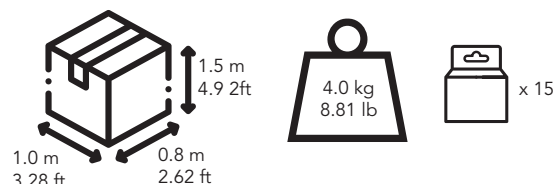

Pallet

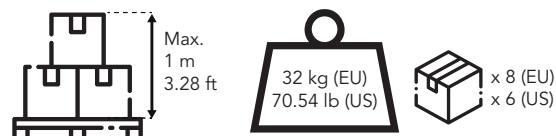



- Rubber housing for better comfort in use.
- Non contact type.
- Professional reference.



PRO



More info

C-LOGIC 95

Non-contact type tachometer

SKU: CLOGIC95CBINT


EAN Code: 8435394747996

UPC Code: 810053671535

CONTENTS



MAIN APPLICATIONS

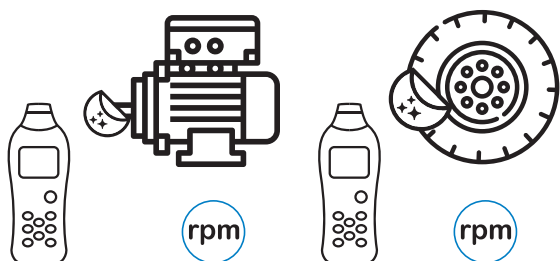

SPECIFICATIONS

RPM

50~99999

Apo

MAX
MIN

H

LOG

FEATURES

Measuring Distance 1.96mm~250mm
1.96"~9.84"

APO	Auto Power Off	•
MAX/MIN		•
Data Logging	100 groups	•
Data Hold		•
Display Backlight		•
LBD	Low Battery Display	•


General

Power supply	4×1.5AAA Batteries included
Product size	155mm×60mm×27mm/6.1"×2.4"×1.1"
Product weight	120g/0.26lb
Certificate	RoHs, CE, ETL


PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box

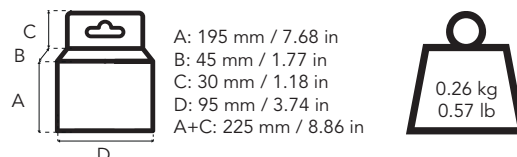

Export carton

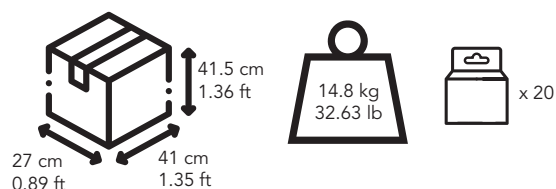

Pallet

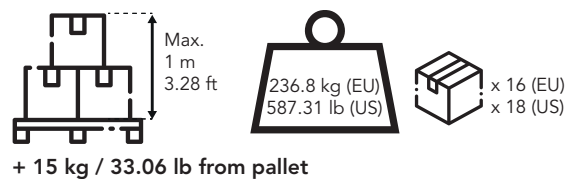



Containing suitable tools for test and measurement on Low voltage installations and sockets:

- **Digital Multimeter C-LOGIC 50**
500Vac/dc-200mAdc/2MΩ)
- **Handheld metal detector**
 - Suitable for indoor decoration use
 - When detect metal or voltage wire, the detector has sound and flash alarm
 - Can detect metal and voltage wire inside wall
- **Voltage detector**
VAC/DC 12-220V

C-LOGIC 310

SKU: CLOGIC310CSINT

EAN Code: 8435394775555




More info


CONTENTS



MAIN APPLICATIONS

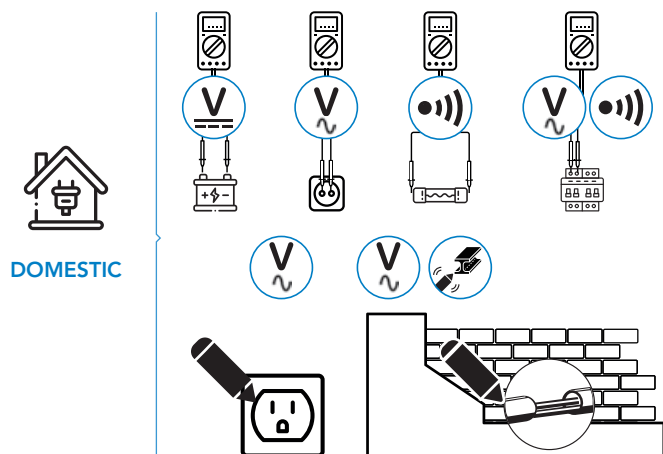

DOMESTIC

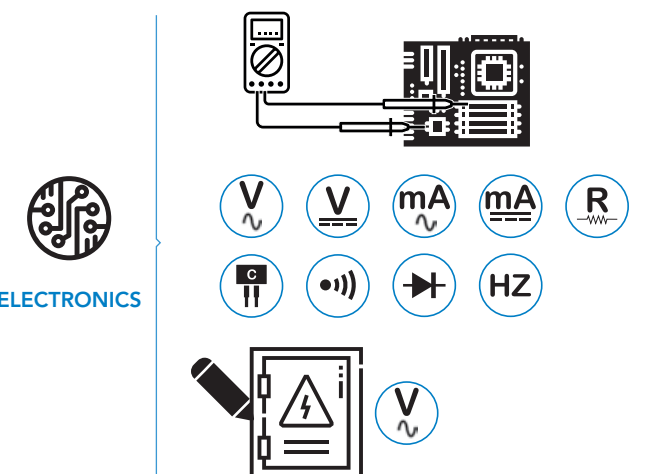

ELECTRONICS

SPECIFICATIONS

• C-LOGIC 50 Digital multimeter

AC VOLTAGE
500V

DC VOLTAGE
500V

DC CURRENT
200mA

RESISTANCE
2MΩ

DISPLAY COUNTS
2000



• Voltage detector

AC VOLTAGE
12-220VAC/DC



• Handheld metal detector




General	C-LOGIC 50	Handheld metal detector	Voltage detector
Product size	120x70x20mm 4.72"x2.75"x0.78"	150x78x24mm 5.9"x3.07"x0.94"	140x26x20mm 5.51"x1.02"x0.78"
Product Weight	202g/0.44lb		60g/0.13lb
Certificate	CE	CE	CE
Safety Rating	CAT III 600V	CAT II 300V	CAT II 300V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200

Different packaging options under request.

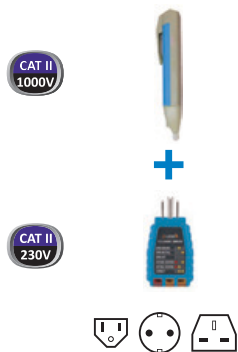

Containing the suitable tools test and measurements on Low voltage installations and sockets:

- **Voltage tester C-LOGIC 25**
Non contact voltage tester
1.000V
- **Socket tester C-LOGIC 380US**
Correct wiring tester



More info

C-LOGIC 311US

ARTICLE	EU VERSION	US VERSION	UK VERSION
SKU	Check	Check	Check
EAN	8435394777382	8435394777399	8435394777481
UPC	-	810053671801	-


CONTENTS



MAIN APPLICATIONS



DOMESTIC

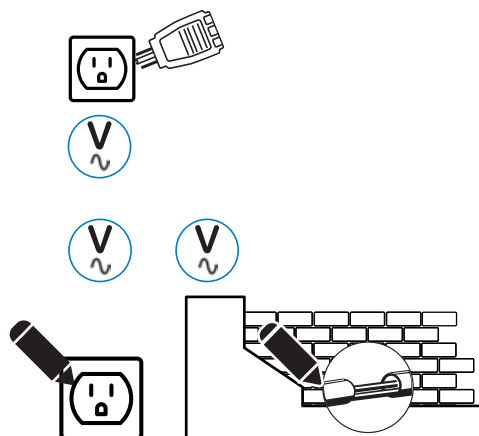

INDUSTRIAL



SPECIFICATIONS

• C-LOGIC 25 Voltage tester

AC VOLTAGE
1000V

FREQUENCY
50/60Hz

AC CURRENT
20V



NCV

• C-LOGIC 380 Socket tester

AC VOLTAGE
12-1000V



C-LOGIC 25

Frequency: 50/60Hz

Sound and light Indication

C-LOGIC 380US

Voltage Range: 110V

LED indication: correct, missing earth;
Live-Earth reverse, Live-Neutral reverse,
missing neutral

General

Power Supply

Product Size

68mm × 60mm × 56mm /
2.67" × 2.36" × 2.2"

Product Weight

60g/0.13lb

Certificate

CE

RoHs, CE, ETL

Safety Rating

CAT II 1000V

CAT II 230V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200

Different packaging options under request.



Containing suitable tools for test and measurement on Low voltage installations and sockets:

- **Digital multimeter C-LOGIC 540**
Allows for easy AC current measurements.
- **Voltage tester C-LOGIC 25**
Non contact voltage tester 1.000V
- **Socket tester C-LOGIC 380**
Correct wiring tester



More info

C-LOGIC 312US


ARTICLE	EU VERSION	US VERSION	UK VERSION
SKU	Check	Check	Check
EAN	8435394777405	8435394777412	
UPC	-	810053671818	

CONTENTS



MAIN APPLICATIONS


DOMESTIC

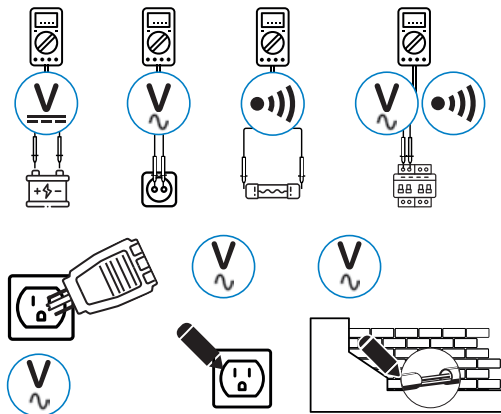

INDUSTRIAL



ELECTRONICS

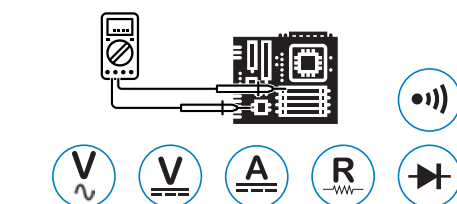

SPECIFICATIONS

• C-LOGIC 540 Digital multimeter

AC VOLTAGE
600V

DC VOLTAGE
600V

DC CURRENT
10A

RESISTANCE
2MΩ

DISPLAY COUNTS
2000



• C-LOGIC 25 Voltage tester

AC VOLTAGE
1000V

FREQUENCY
50/60Hz



NCV

• C-LOGIC 380 Socket tester

AC VOLTAGE
12-1000V




C-LOGIC 540		C-LOGIC 25	C-LOGIC 380US
Display counts: 2000		Frequency: 50/60Hz	Voltage Range: 110V
Battery Test : 1.5V/9V/12V		Sound and light Indication	LED indication: correct, missing earth; Live-Earth reverse, Live-Neutral reverse, missing neutral
Diode: Open Voltage 3.0V			
Continuity Buzzer: <50Ω			
Data hold			
Low Battery Display			
General	C-LOGIC 540	C-LOGIC 25	C-LOGIC 380
Power Supply	1x9V6F22 NEDA 1604 Battery included		
Product Size	145mm x 76mm x 40mm / 5.7" x 2.99" x 1.57"		68mm x 60mm x 56mm / 2.67" x 2.36" x 2.2"
Product Weight	202g/0.44lb		60g/0.13lb
Certificate	RoHs, CE, ETL	CE	RoHs, CE, ETL
Safety Rating	CAT III 600V	CAT II 1000V	CAT II 230V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200

Different packaging options under request.

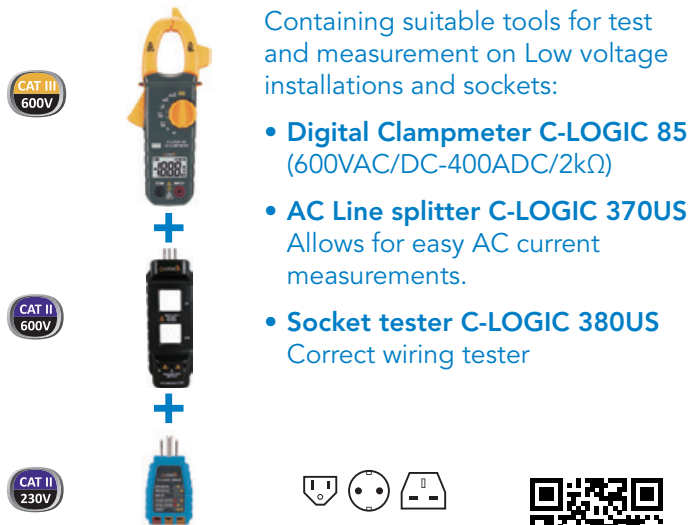

C-LOGIC 313US

Containing suitable tools for test and measurement on Low voltage installations and sockets:


- **Digital Clampmeter C-LOGIC 85** (600VAC/DC-400ADC/2kΩ)
- **AC Line splitter C-LOGIC 370US** Allows for easy AC current measurements.
- **Socket tester C-LOGIC 380US** Correct wiring tester




More info

ARTICLE	EU VERSION	US VERSION	UK VERSION
SKU	Check	Check	Check
EAN	8435394777429	8435394777436	8435394777504
UPC	-	810053671825	-

CONTENTS




MAIN APPLICATIONS

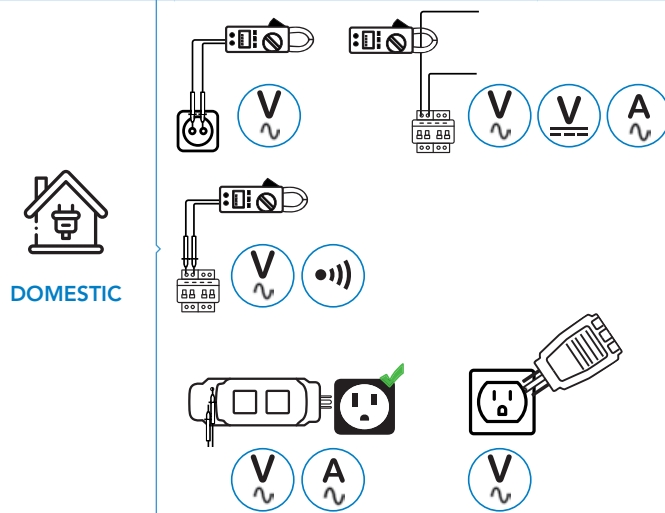

DOMESTIC



INDUSTRIAL

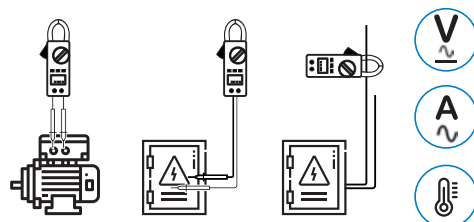

SPECIFICATIONS

• C-LOGIC 85 Digital Clampmeter

AC VOLTAGE
600V

DC VOLTAGE
600V

AC CURRENT
20V

RESISTANCE
2kΩ

DISPLAY COUNTS
2000

Ø 28mm
1.1"



• C-LOGIC 370 AC Line splitter

AC VOLTAGE
250V

DC VOLTAGE
15A

X1 - X10
AC CURRENT

• C-LOGIC 380 Socket tester

AC VOLTAGE
12-1000V



C-LOGIC 85	C-LOGIC 370	C-LOGIC 380US
Display counts: 2000	Easy AC current measurements	Voltage Range: 110V
Jaw Opening: Ø28mm/1.1"	Safe current measure	LED indication: correct, missing earth; Live-Earth reverse, Live-Neutral reverse, missing neutral
Diode: Open Voltage 4.5V	Separates de Hot/Live conductor from the neutral and ground	
Continuity Buzzer: <70Ω	Voltage check sockets for easy power calculations	

Data hold

Low Battery Display

General	C-LOGIC 85	C-LOGIC 370	C-LOGIC 380
Power Supply	3x 1.5V AAA Batteries included		
Product Size	198mm × 79mm × 38mm / 7.8" × 3.1" × 1.5"	200mm × 57mm × 48mm / 7.8" × 2.2" × 2.9"	68mm × 60mm × 56mm / 2.67" × 2.36" × 2.2"
Product Weight	195g/0.43lb	140g/0.3lb	60g/0.13lb
Certificate	RoHs, CE, ETL	RoHs, ETL	RoHs, CE, ETL
Safety Rating	CAT III 600V	CAT II 600V	CAT II 230V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200

Different packaging options under request.



Containing suitable tools for test and measurement on Low voltage installations:

- **Digital Clampmeter C-LOGIC 85** (600VAC/DC-400ADC/2k Ω)
- **Digital multimeter C-LOGIC 540** Allows for easy AC current measurements.

C-LOGIC 314

SKU: Check


EAN Code: 8435394777443

UPC Code: 810053671832



More info


CONTENTS




MAIN APPLICATIONS




DOMESTIC

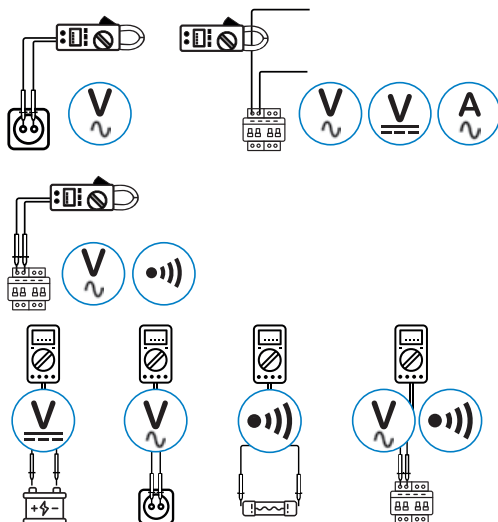

INDUSTRIAL

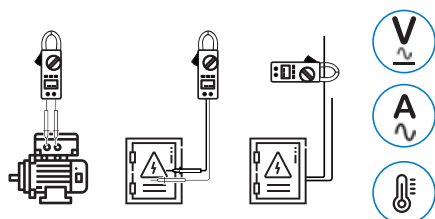

ELECTRONICS

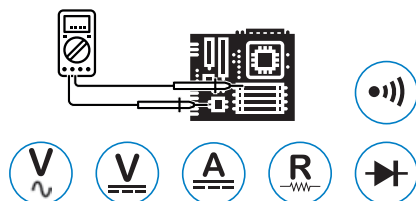

SPECIFICATIONS

• C-LOGIC 85 Digital Clampmeter

AC VOLTAGE
600V

DC VOLTAGE
600V

AC CURRENT
20V

RESISTANCE
2k Ω

DISPLAY COUNTS
2000

28mm
1.1"



• C-LOGIC 540 Digital multimeter

AC VOLTAGE
600V

DC VOLTAGE
600V

DC CURRENT
10A

RESISTANCE
2M Ω

DISPLAY COUNTS
2000



C-LOGIC 85

C-LOGIC 540

Display counts: 2000

Display counts: 2000

Jaw Opening: $\varnothing$ 28mm/1.1"

Battery Test : 1.5V/9V/12V

Diode: Open Voltage 4.5V

Diode: Open Voltage 3.0V

Continuity Buzzer: <70 Ω

Continuity Buzzer: <50 Ω

Data hold

Data hold

Low Battery Display


Low Battery Display

General	C-LOGIC 85	C-LOGIC 540
Power Supply	3x1.5V AAA Batteries included	1x9V6F22 NEDA 1604 Battery included
Product Size	198mm x 79mm x 38mm / 7.8" x 3.1" x 1.5"	145mm x 76mm x 40mm / 5.7" x 2.99" x 1.57"
Product Weight	195g/0.43lb	202g/0.44lb
Certificate	RoHs, CE, ETL	RoHs, CE, ETL
Safety Rating	CAT III 600V	CAT III 600V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200

Different packaging options under request.

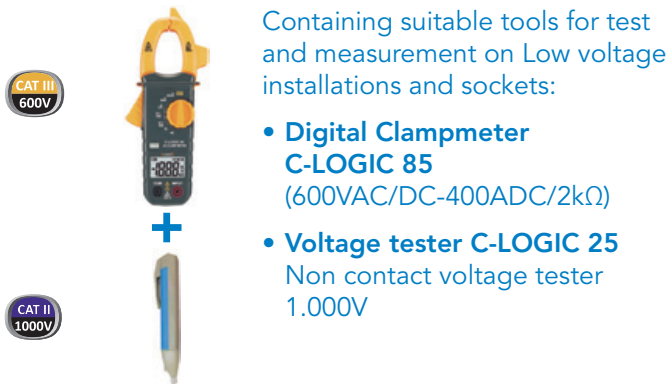

C-LOGIC 315

SKU: Check
EAN Code: 8435394777450
UPC Code: 810053671849



More info


CONTENTS




MAIN APPLICATIONS



DOMESTIC

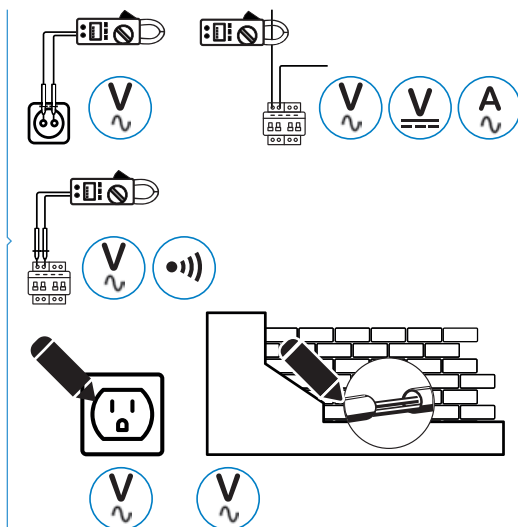

INDUSTRIAL

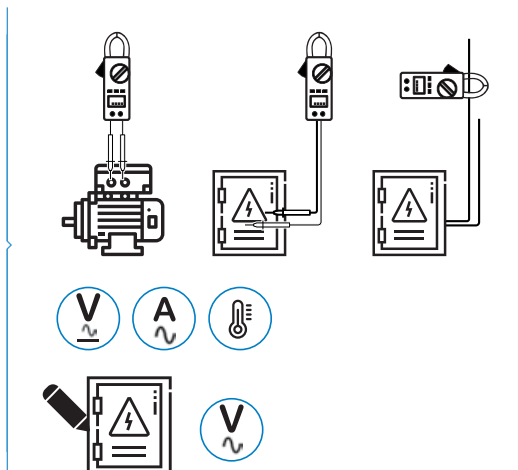

SPECIFICATIONS

• C-LOGIC 85 Digital Clampmeter

AC VOLTAGE
600V

DC VOLTAGE
600V

AC CURRENT
20V

RESISTANCE
2kΩ

DISPLAY COUNTS
2000

Ø 28mm
1.1"



• C-LOGIC 25 Voltage tester

AC VOLTAGE
1000V

FREQUENCY
50/60Hz



C-LOGIC 85

C-LOGIC 25

Display counts: 2000

Frequency: 50/60Hz

Jaw Opening: Ø28mm/1.1"

Sound and light Indication

Diode: Open Voltage 4.5V

Continuity Buzzer: <70Ω

Data hold

Low Battery Display

General	C-LOGIC 85	C-LOGIC 25
Power Supply	3×1.5V AAA Batteries included	
Product Size	198mm × 79mm × 38mm / 7.8"×3.1"×1.5"	
Product Weight	195g/0.43lb	
Certificate	RoHs, CE, ETL	CE
Safety Rating	CAT III 600V	CAT II 1000V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200

Different packaging options under request.



Containing suitable tools for test and measurement on Low voltage installations and sockets:

- **Digital multimeter C-LOGIC 540**
Allows for easy AC current measurements.
- **Voltage tester C-LOGIC 25**
Non contact voltage tester 1.000V
- **Electrical scissors**

C-LOGIC 316

SKU: Check
EAN Code: 8435394777467
UPC Code: 810053671856




More info

CONTENTS



MAIN APPLICATIONS

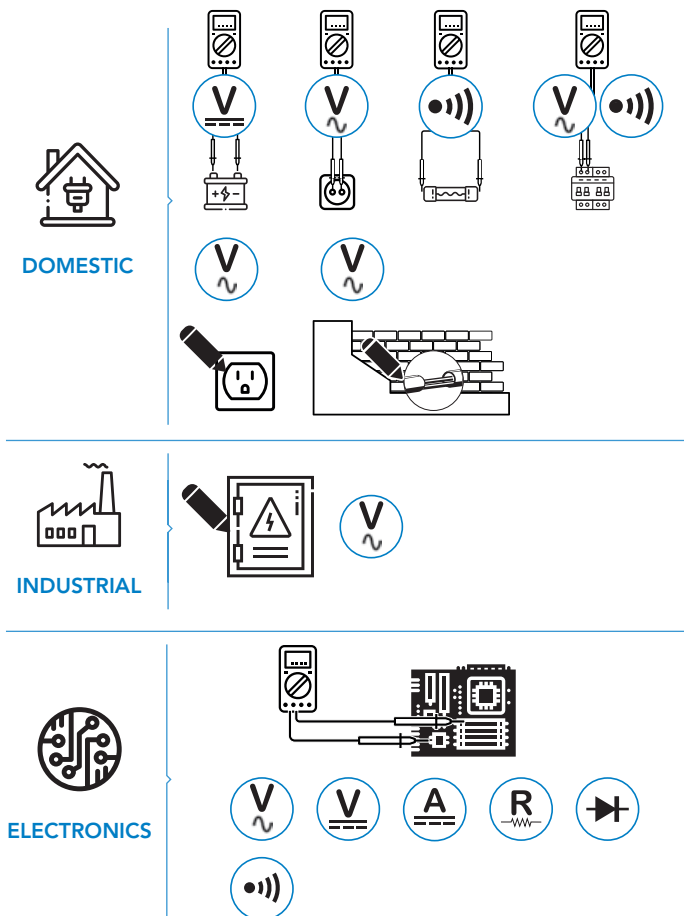

SPECIFICATIONS

• C-LOGIC 540 Digital multimeter

AC VOLTAGE
600V

DC VOLTAGE
600V

DC CURRENT
10A

RESISTANCE
2MΩ

DISPLAY COUNTS
2000



• C-LOGIC 25 Voltage tester

AC VOLTAGE
1000V

FREQUENCY
50/60Hz



NCV

C-LOGIC 540		C-LOGIC 25	
Display counts: 2000		Frequency: 50/60Hz	
Battery Test : 1.5V/9V/12V		Sound and light Indication	
Diode: Open Voltage 3.0V			
Continuity Buzzer: <50Ω			
Data hold			
Low Battery Display			
General	C-LOGIC 540	C-LOGIC 25	
Power Supply	1x9V6F22 NEDA 1604 Battery included		
Product Size	145mm x 76mm x 40mm / 5.7" x 2.99" x 1.57"		
Product Weight	202g/0.44lb		
Certificate	RoHs, CE, ETL		CE
Safety Rating	CAT III 600V		CAT II 1000V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200

Different packaging options under request.



Containing suitable tools for test and measurement on Low voltage installations and sockets:

- **Digital multimeter C-LOGIC 540**
Allows for easy AC current measurements.
- **Cable stripper**
- **Electrical scissors**


C-LOGIC 317

SKU: Check
EAN Code: 8435394777474
UPC Code: 810053671863



More info


CONTENTS




MAIN APPLICATIONS



DOMESTIC

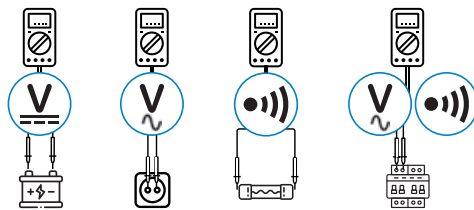

ELECTRONICS

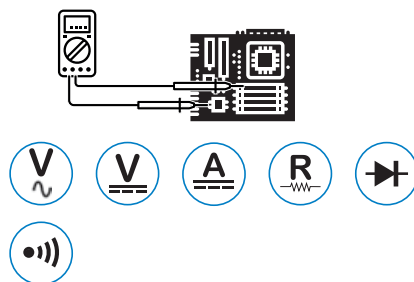

SPECIFICATIONS

• C-LOGIC 540 Digital multimeter

AC VOLTAGE
600V

DC VOLTAGE
600V

DC CURRENT
10A

RESISTANCE
2MΩ

DISPLAY COUNTS
2000



C-LOGIC 540

Display counts: 2000

Battery Test : 1.5V/9V/12V

Diode: Open Voltage 3.0V

Continuity Buzzer: <50Ω

Data hold


Low Battery Display

General	C-LOGIC 540
Power Supply	1x9V6F22 NEDA 1604 Battery included
Product Size	145mm x 76mm x 40mm / 5.7" x 2.99" x 1.57"
Product Weight	202g/0.44lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT III 600V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200

Different packaging options under request.

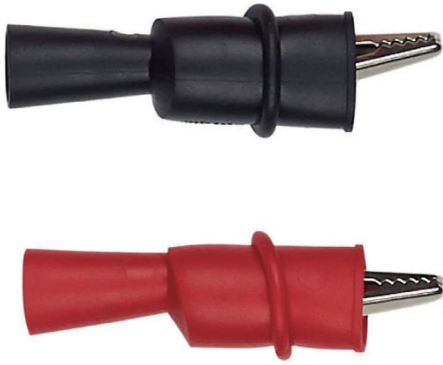

C-LOGIC 323

Big size cocodriles
SKU: 810053670804

MAIN FEATURES

- Big size crocodiles
- CAT IV 600V



C-LOGIC 322

Test leads
SKU: 810053670811

MAIN FEATURES

- Nickel-plated anti-corrosion metal tips.
- CAT IV 600V



ENERGY SAVING

- MOTION DETECTORS
- SECURITY DETECTORS
- TIMER SWITCHES
- USB PLUGS

SYMBOL	DESCRIPTION
	Additional output
	Adjustable detection area
	Adjustment twilight
	Alexa connectivity
	Android connectivity
	Auto mode
	Backlight display
	Battery class
	Cable class
	Communication between devices
	Delay time
	E27 installation
	Frost protection
	Head rotation
	Holiday mode
	iOS connectivity

SYMBOL	DESCRIPTION
	Light indicators
	Lux level adjustment
	Manual control
	Max. communication distance
	Number of melodies
	Power Supply
	Programming intervals
	Protection degree
	Setting temperature range
	Sound level
	Suitable for heating and cooling units
	Suitable for heating units
	Suitable for LED lights
	Surge protection
	TUYA connectivity
	UV Protection



- 360° coverage area.
- Max. range 19.6 ft diameter.
- Twilight adjustment: 3 to 2.000 lux.
- Time adjustment: 10 seconds to 5 minutes.
- Maximum contact capacity: 60W (E27/E26).


C-LOGIC 655-MD

Lampholder with integrated detector
SKU: CLOGIC655MD230VCBINT
EAN Code: 8435394777559
UPC Code: 810053671870



More info

SPECIFICATIONS

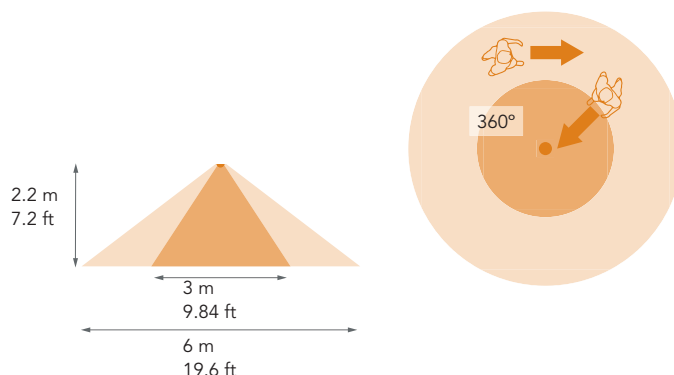


FEATURES

Angle of coverage	360°
Area of coverage	19.6 ft diameter
Adjustment twilight	3 - 2000 lux
Contact capacity	Incandescence: 60W Energy saving lamps: 60W LED lamps: 60W
Supply voltage	110-240V. 50Hz


PACKAGING & LOGISTICS INFORMATION

HS Code: 85414080


Carton box

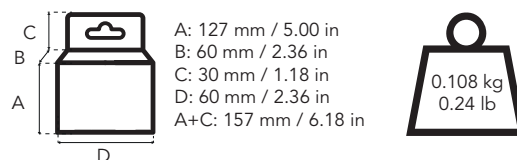

Export carton

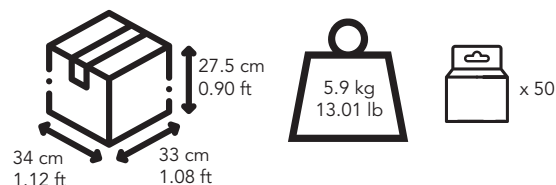


Pallet

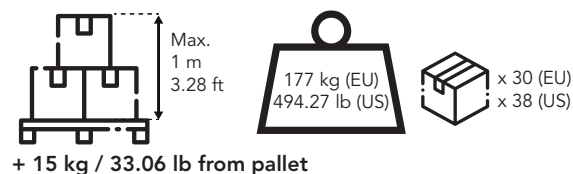

CONTENTS




MAIN APPLICATIONS

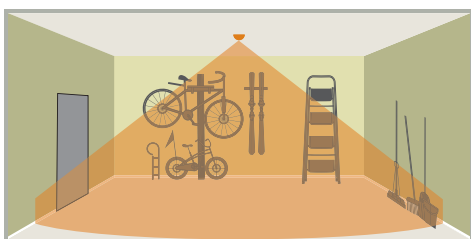

CONNECTION GUIDE



E27/E26



DIMENSIONS



C-LOGIC 600-MD

Mini sensor alarm with integrated

presence detector

SKU: CLOGIC600MDCBINT

EAN Code: 8435394748139

UPC Code: 810053671313

- Supply: 1 x 9V battery (included)
- 60° coverage area
- Max. range of 26.24 ft
- Alarm sound: ≥ 70 dB
- 3 positions:
 - Chime: ring function
 - Alarm
 - OFF




More info


CONTENTS




MAIN APPLICATIONS

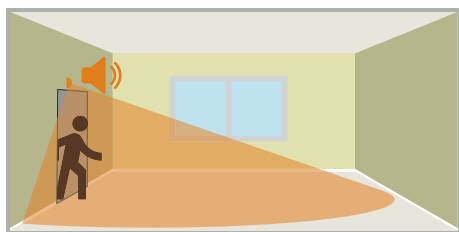


CONNECTION GUIDE



DIMENSIONS





INSTALLATION

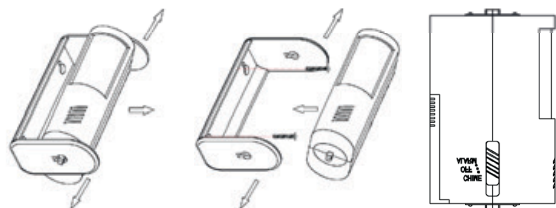

Ø 0.137" x 0.39"

Ø 0.11"

SPECIFICATIONS




FEATURES

Angle of coverage	60°
Max. area of coverage	26.24 ft
Sound level	≥ 70 dB
Supply voltage	1 x 9V battery included

PACKAGING & LOGISTICS INFORMATION

HS Code: 85365080


Carton box




A: 75 mm / 2.95 in
B: 42 mm / 1.65 in
C: 30 mm / 1.18 in
D: 113 mm / 4.45 in
A+C: 105 mm / 4.13 in



Export carton



Pallet



+ 15 kg / 33.06 lb from pallet



- CO² detector
- Temperature
- Humidity



C-LOGIC 7100-AQ

Air quality meter

SKU: CLOGIC7100AQCBINT


EAN code: 8435394782348

UPC code: 810053674895




Más info.


CONTENTS

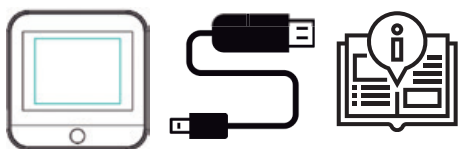


DIMENSIONS



MAIN APPLICATIONS

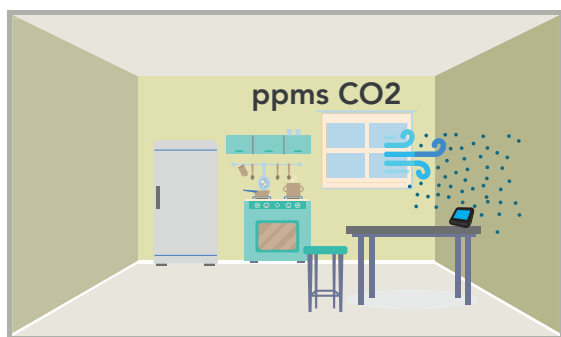

SPECIFICATIONS



FEATURES

CO² measuring range: 400-5000PPM

CO² sensor: NDIR

Temperature range: -10°C - +50°C

Humidity range: 0% - 85%


Dimensions: 110 x 110 x 77 mm. Weight: 200 g
4.33"x4.33"x3.03". Weight: 0.44 lb

Power supply: 2200mAh battery

PACKAGING & LOGISTICS INFORMATION

HS code: 85311030


Carton box




A: 75 mm / 2,95 in
B: 115 mm / 4,52 in
C: 0 mm / 1.18 in
D: 115 mm / 4,52 in
A+C: 75 mm / 2,95 in



Export carton



Pallet



+ 15 kg / 33.06 lb from pallet



- Smoke detector
- <85dB



C-LOGIC 700-SD

Smoke detector
SKU: CLOGIC700SDCBINT
EAN Code: 8435394748146
UPC Code: 810053671320



More info

SPECIFICATIONS



FEATURES

Dimensions: 102 x 36 x 69 mm / 4,01"x1.41"x2.71"

On-celling installation

Suitable for indoor use

Acoustic indication of low battery


Power supply: 1 x 9V battery included

According to EN 14604:2005 / AC:2008

PACKAGING & LOGISTICS INFORMATION

HS Code: 90278090


Carton box





A: 105 mm / 4.13 in
B: 35 mm / 1.38 in
C: 0 mm / 0 in
D: 105 mm / 4.13 in
A+C: 105 mm / 4.13 in



Export carton




Pallet




+ 15 kg / 33.06 lb from pallet


CONTENTS




MAIN APPLICATIONS

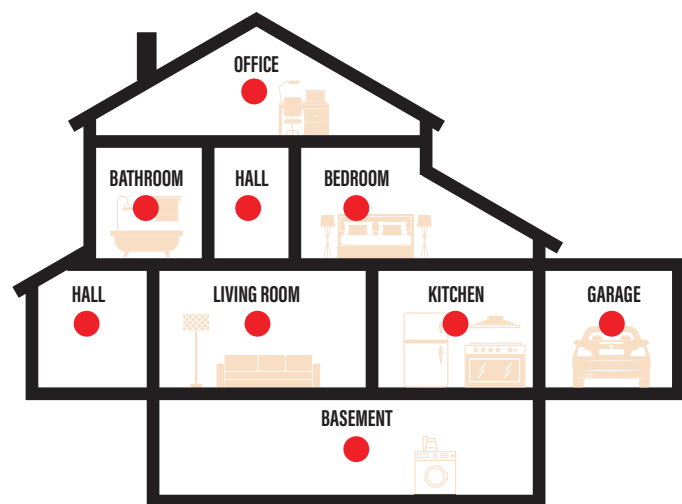


CONNECTION GUIDE



DIMENSIONS



INSTALLATION

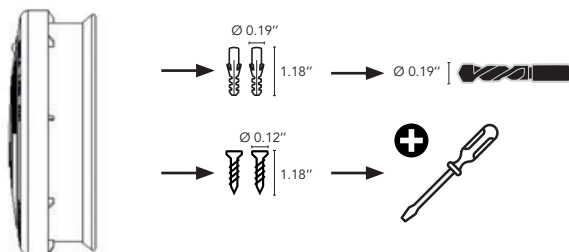



- Mini Smoke detector
- <85dB



C-LOGIC 720-SD

Mini smoke detector
SKU: CLOGIC720SDCBINT
EAN Code: 8435394748160
UPC Code: 810053671337



More info

SPECIFICATIONS



<85 dB



FEATURES

Dimensions: 72 x 37 mm / 2.83"x1.45"

On-celling installation compact size

Suitable for indoor use

Acoustic indication of detection


Power supply: 3 x 3V CR2450 batteries included

According to EN 14604:2005/AC:2008

PACKAGING & LOGISTICS INFORMATION

HS Code: 90278090


Carton box



A: 75 mm / 2.95 in
B: 40 mm / 1.57 in
C: 0 mm / 0 in
D: 75 mm / 2.95 in
A+C: 75 mm / 2.95 in




Export carton



39 cm / 1.28 ft
22 cm / 0.72 ft
17 cm / 0.56 ft




Pallet




+ 15 kg / 33.06 lb from pallet




CONTENTS




MAIN APPLICATIONS

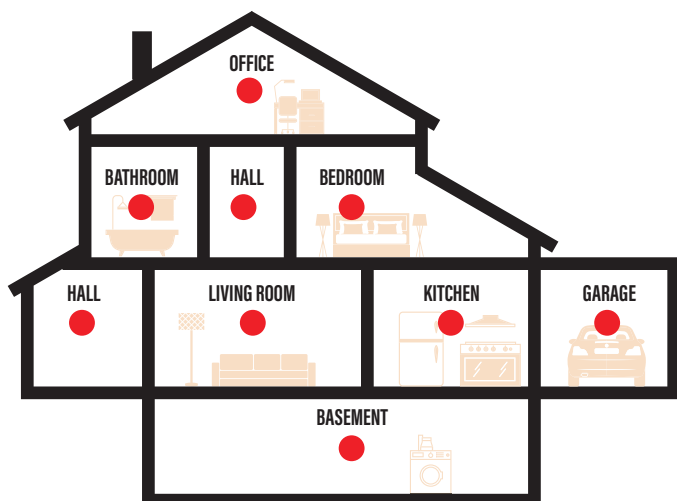


CONNECTION GUIDE

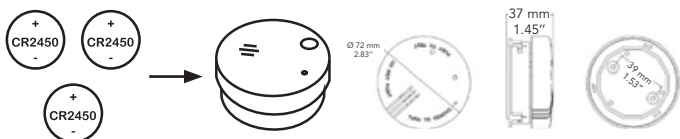

DIMENSIONS

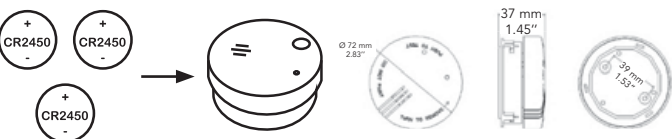

INSTALLATION

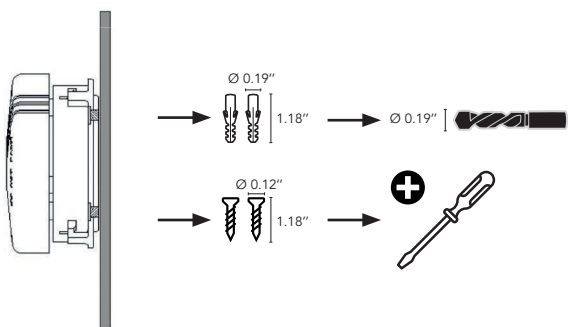



- Wireless Smoke Detector
- <85dB



C-LOGIC 710-SD

Wireless smoke detector
SKU: CLOGIC710SDCBINT
EAN Code: 8435394748177
UPC Code: 810053671344



More info

SPECIFICATIONS



FEATURES

Dimensions: 128 x 49 mm / 5.03"x1.92"

On-celling installation

Suitable for indoor use

Acoustic indication of detection

Power supply: 1 x 9V battery + 3 x 1.5V batteries included


Indication light of operation

According to EN 14604:2005 / AC:2008

PACKAGING & LOGISTICS INFORMATION

HS Code: 90278090


Carton box





A: 130 mm / 5.12 in
B: 55 mm / 2.17 in
C: 0 mm / 0 in
D: 130 mm / 5.12 in
A+C: 130 mm / 5.12 in



Export carton




Pallet




+ 15 kg / 33.06 lb from pallet


CONTENTS



MAIN APPLICATIONS

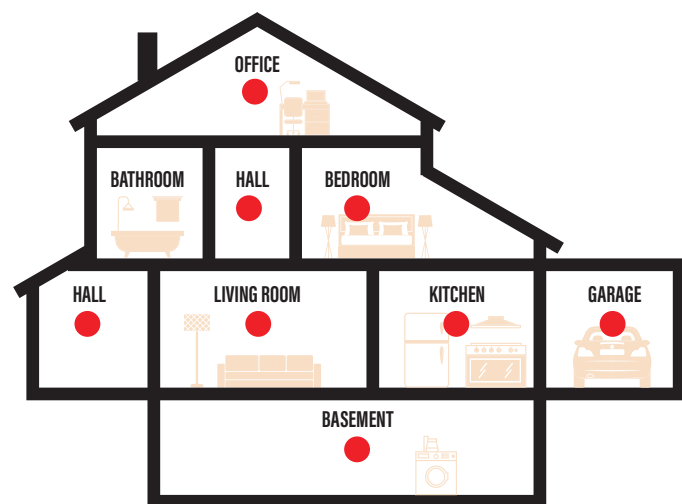


CONNECTION GUIDE



DIMENSIONS



INSTALLATION

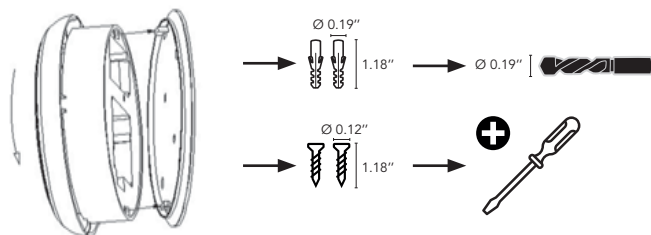



- Gas detector
- Liquid gas and natural gas leakage (LPG) detection
- <85dB



C-LOGIC 770-SD

Gas detector
SKU: CLOGIC770SD230VCBINT
EAN Code: 8435394748184




More info


CONTENTS




MAIN APPLICATIONS

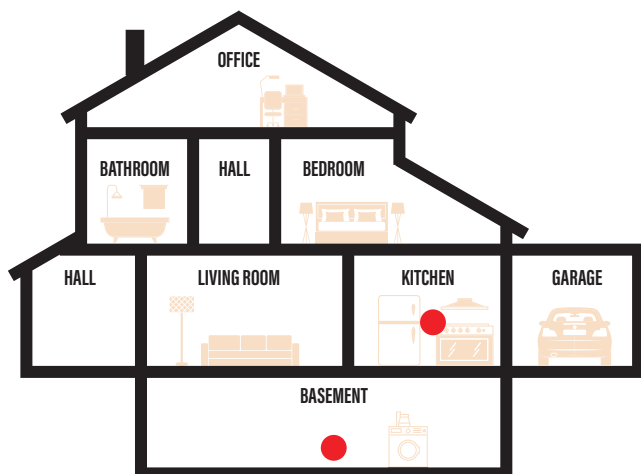


CONNECTION GUIDE



DIMENSIONS



INSTALLATION

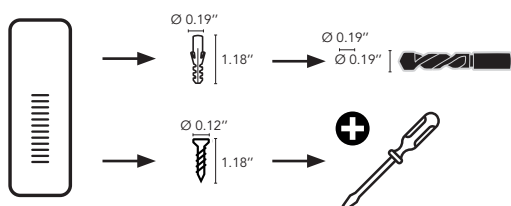

SPECIFICATIONS



FEATURES

Dimensions: 126 x 73 x 76 mm / 4.96" x 2.87" x 2.99"

On-wall installation

Suitable for indoor use

Liquid gas and natural gas leakage (LPG) detection

Acoustic indication of detection

Alarm level: < 25%LEL

Acoustic indication of detection


Power supply: 230VAC 50-60 Hz

Plug type: Schuko


PACKAGING & LOGISTICS INFORMATION

HS Code: 90278090


Carton box

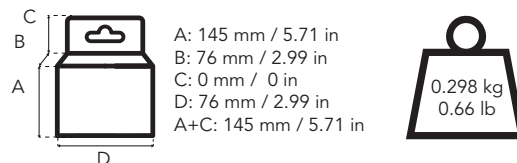

Export carton

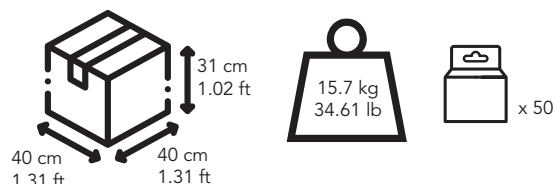

Pallet

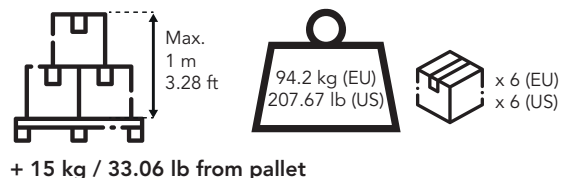

+ 15 kg / 33.06 lb from pallet



- Suitable for the detection of water filtrations
- <85dB
- Response time: <7 seconds



More info

C-LOGIC 730-SD

Flood detector

SKU: CLOGIC730SDCBINT


EAN Code: 8435394748214

UPC Code: 810053671375


CONTENTS




MAIN APPLICATIONS

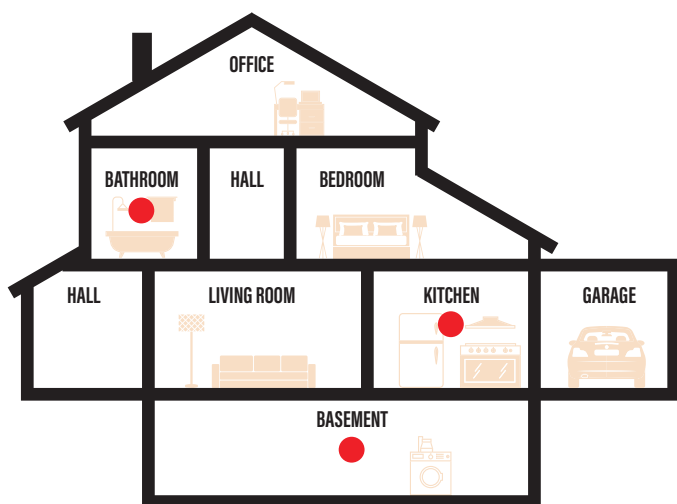


CONNECTION GUIDE



DIMENSIONS



INSTALLATION

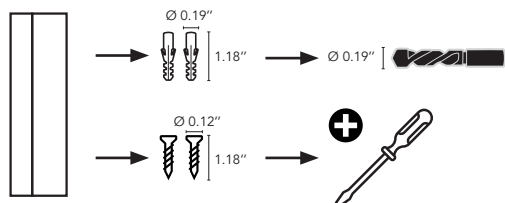

SPECIFICATIONS



<85 dB

FEATURES

Suitable for the detection of water filtrations

Installation on surface

Response time: <7 seconds

Operating temperature: +1°C to 60°C / 33.8°F to 140°F


Power supply: 1 x 9V battery included

Dimensions: 86 x 82 x 30 mm. Weight: 100 g
3.38"x3.22"x1.18". Weight: 0.22 lb



PACKAGING & LOGISTICS INFORMATION

HS Code: 90278090



Carton box

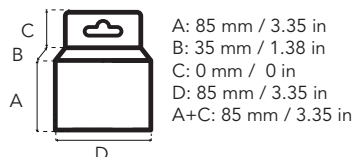

Export carton



Pallet



+ 15 kg / 33.06 lb from pallet



- CO detector
- <85dB



C-LOGIC 750-SD

CO detector
SKU: CLOGIC750SDCBINT
EAN Code: 8435394748191
UPC Code: 810053671351




More info


CONTENTS




MAIN APPLICATIONS

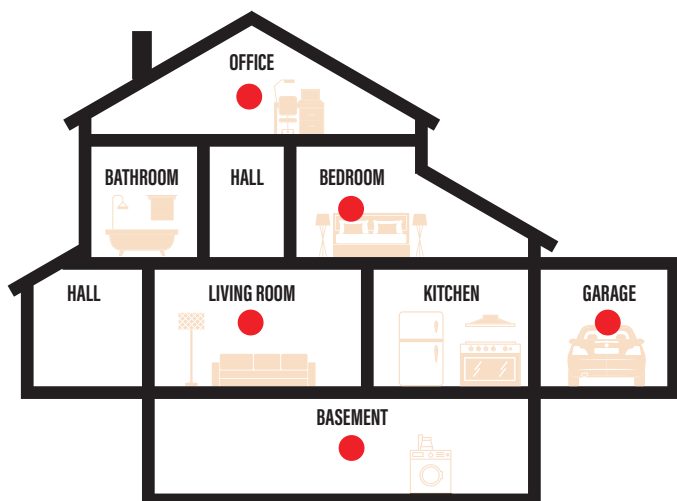

CONNECTION GUIDE



DIMENSIONS



SPECIFICATIONS




FEATURES

- On-celling installation
- Suitable for indoor use
- LCD screen with visual indication of CO concentration
- Acoustic and light indication of low battery
- Dimensions: 115 x 37 mm. Weight: 120 g
4.52"x 1.45". Weight: 0.26 lb
- Power supply: 3 x 1.5V batteries included


PACKAGING & LOGISTICS INFORMATION

HS Code: 90278090


Carton box

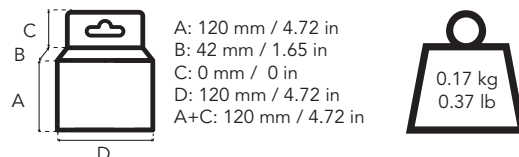


Export carton

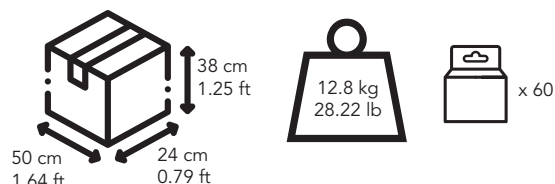

Pallet

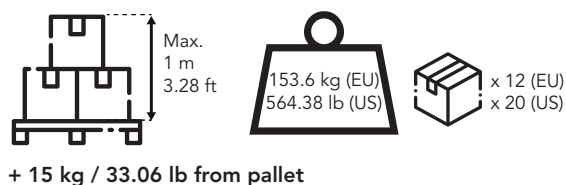

INSTALLATION

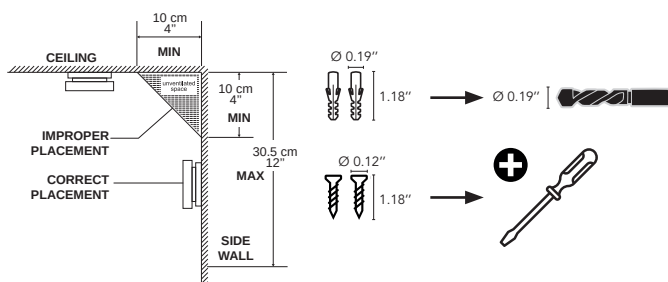




- CO + Smoke detector
- <85dB




More info

C-LOGIC 740-SD
CO+Smoke detector
SKU: CLOGIC740SDCBINT
EAN Code: 8435394776842
UPC Code: 810053671481


CONTENTS




MAIN APPLICATIONS

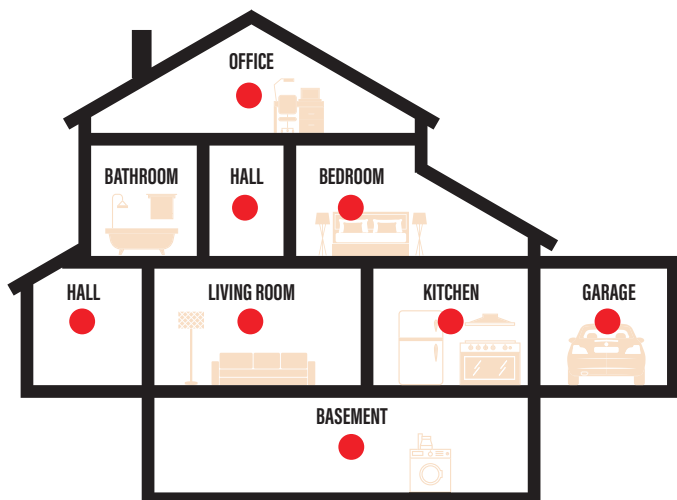


CONNECTION GUIDE



DIMENSIONS



INSTALLATION

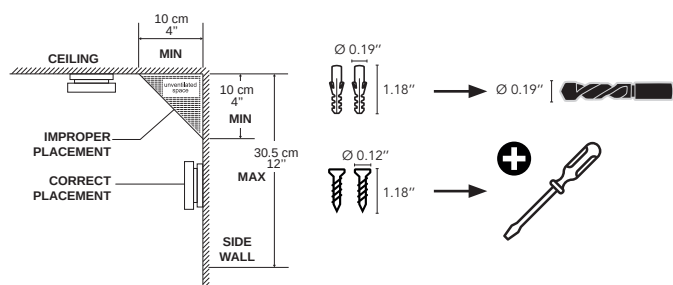

SPECIFICATIONS



FEATURES

On-celling installation

Suitable for indoor use

LCD screen with visual indication of CO concentration and of smoke detection

Acoustic and light indication of low battery

Indication light of operation via LED


Dimensions: 115 x 37 mm. Weight: 120 g
4.52"x 1.45". Weight: 0.26 lb

Power supply: 1 x 9V batteries included

PACKAGING & LOGISTICS INFORMATION

HS Code: 84306243


Carton box




A: 120 mm / 4.72 in
B: 42 mm / 1.65 in
C: 0 mm / 0 in
D: 120 mm / 4.72 in
A+C: 120 mm / 4.72 in



Export carton



Pallet



+ 15 kg / 33.06 lb from pallet



- Suitable for the detection of early signs of fire
- <85dB
- Detection temperature 131±41 °F



C-LOGIC 760-SD

Fire detector
SKU: CLOGIC760SDCBINT
EAN Code: 8435394748207
UPC Code: 810053671368



More info

SPECIFICATIONS



FEATURES

On-wall or on-ceiling installation

Suitable for indoor use

Detection temperature 131±41 °F

Acoustic and light indication of low battery


Dimensions: 107 x 107 x 37.5 mm. Weight: 220 g
4.21"x4.21"x1.47". Weight: 0.48 lb

Power supply: 1 x 9V battery included

PACKAGING & LOGISTICS INFORMATION

HS Code: 90278090


Carton box





A: 115 mm / 4.53 in
B: 55 mm / 2.17 in
C: 35.5 mm / 1.40 in
D: 115 mm / 4.53 in
A+C: 150.5 mm / 5.93 in



Export carton




Pallet




+ 15 kg / 33.06 lb from pallet



CONTENTS




MAIN APPLICATIONS

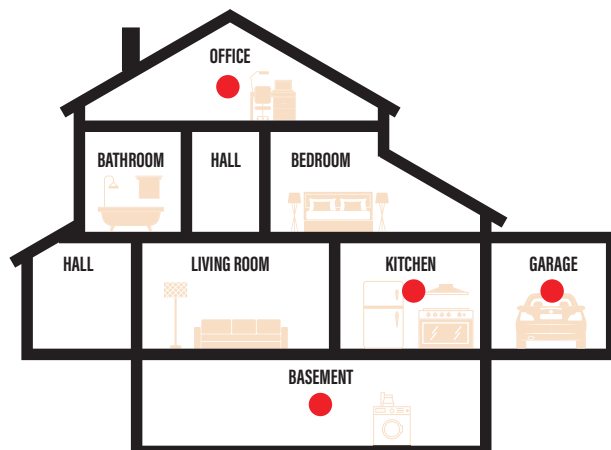

CONNECTION GUIDE



INSTALLATION

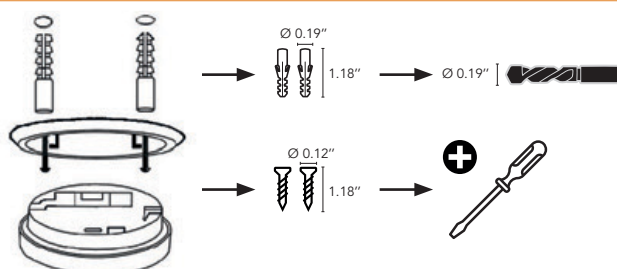



- Up to 48 commands per day on / off
- Min operation: 30 minutes



More info

C-LOGIC 300-PT

Plug-In Mechanical Time-Switch
SKU: CLOGIC300PT125VCBINT
EAN Code: 8435394776804
UPC Code: 810053671443


CONTENTS



MAIN APPLICATIONS




CONNECTION GUIDE



Type B plug
Nema 5, 3
pole USA

DIMENSIONS



SPECIFICATIONS




FEATURES

Up to 48 programs per day
Power supply: 125V~, 50-60Hz
Min operation: 30 minutes
Max Load: 15A (Resistive)
Operation modes: ON/AUTO



PACKAGING & LOGISTICS INFORMATION

HS Code:



Carton box

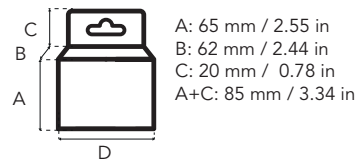

Export carton




Pallet



+ 15 kg / 33.06 lb from pallet

INSTALLATION

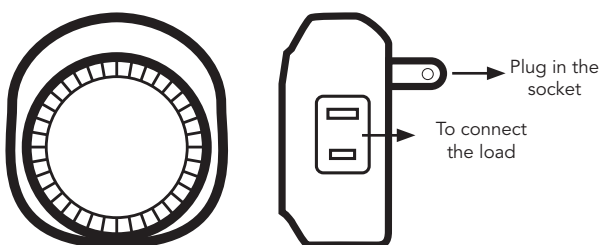



- Set specific on / off times for your appliances such as coffeemaker, lamps, etc.
- Ideal for energy saving
- Large LCD screen, shows the status of the selected program and the real time




C-LOGIC 310-PT

Plug-In Digital Time-Switch
SKU: CLOGIC310PT125VCBINT
EAN Code: 8435394776811
UPC Code: 810053671450



More info

SPECIFICATIONS



FEATURES

Maximum of 140 weekly on/off programs

Power supply: 125V~, 50-60Hz

Minimum 1 min interval


Max Load: 15A (Resistive)

Operation modes: ON/OFF/AUTO

PACKAGING & LOGISTICS INFORMATION

HS Code: 9106900000



Carton box






A: 65 mm / 2.55 in
B: 79 mm / 3.11 in
C: 20 mm / 0.78 in
A+C: 85 mm / 3.34 in



Export carton



Pallet



+ 15 kg / 33.06 lb from pallet


CONTENTS



MAIN APPLICATIONS




CONNECTION GUIDE




Type B plug
Nema 5, 3
pole USA

DIMENSIONS



INSTALLATION

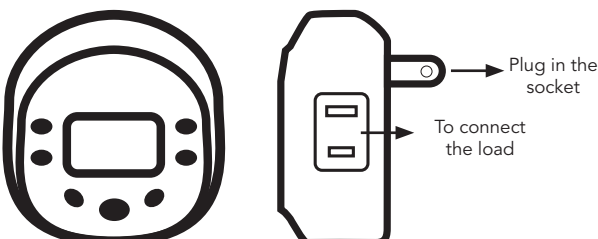



- Provides basic daily program setting
- Added protection with grounded outlet
- Outdoor timer, perfect for controlling outdoor lighting, decorations, fountains...etc



C-LOGIC 320-PT

Outdoor Plug-In Mechanical Timer

SKU: CLOGIC320PT125VCBINT

EAN Code: 8435394776828

UPC Code: 810053671467




More info


CONTENTS




MAIN APPLICATIONS




CONNECTION GUIDE




DIMENSIONS

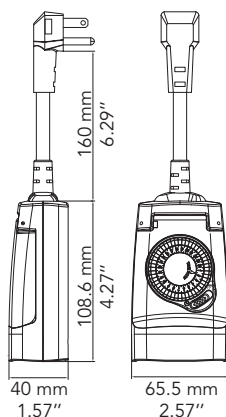

INSTALLATION



SPECIFICATIONS



FEATURES

Programmable in 30-minute intervals

Maximum 48 individual ON/OFF setting per day

Cable: 14AWG x 3C SJTW UL approved PVC cable

Power supply: 125V~, 60Hz


Max Load: 15A (Resistive)

Protection degree: IP41

PACKAGING & LOGISTICS INFORMATION

HS Code:


Carton box





A: 153 mm / 6.02 in
B: 69 mm / 2.71 in
C: 40 mm / 1.57 in
A+C: 193 mm / 7.59 in



Export carton



Pallet



+ 15 kg / 33.06 lb from pallet



- Unique design to hold the smartphone while charging
- Single outlet, grounded



C-LOGIC 330-PT

Plug Socket with USB
SKU: CLOGIC330PT125VCBINT
EAN Code: 8435394776835
UPC Code: 810053671474

SPECIFICATIONS



FEATURES

USB output voltage: 5VDC, 2.4A

USB output current: Max. 2400mA for 2 USB ports using simultaneously

USB input: 125VAC, 60Hz


Children protector

Max. Load: 125V~ 60Hz, 15A, 1875W (Resistive)

PACKAGING & LOGISTICS INFORMATION

HS Code: 85366990



Carton box





A: 70 mm / 2.75 in
B: 65 mm / 2.55 in
C: 30 mm / 1.18 in
A+C: 100 mm / 3.93 in



Export carton



Pallet




+ 15 kg / 33.06 lb from pallet


CONTENTS



MAIN APPLICATIONS

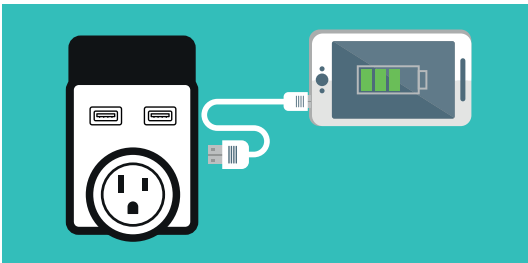


CONNECTION GUIDE




Type B plug
Nema 5, 3
pole USA

DIMENSIONS



INSTALLATION

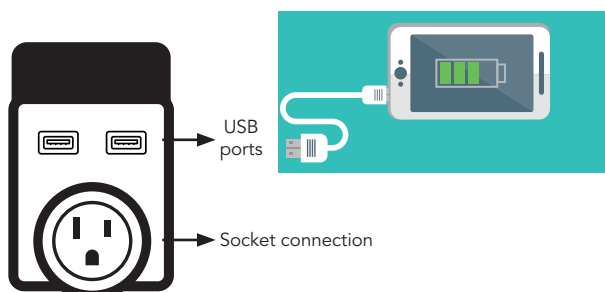



INSTALLATION

- FISH TAPES REEL
- INSULATING GEL

SYMBOL	DESCRIPTION
	Available lengths
	Biodegradable
	Cable terminals
	Diameter
	Drying time
	Dropper
	Fish tapes reels diameters
	Head rotation
	Insulation power

SYMBOL	DESCRIPTION
	Interchangeables terminals
	Max. tensile strength
	Non corrosive
	Non flammable
	Non toxic
	Optimal tube diameter
	Ph neutral
	Protection degree
	Surge protection



- Made on steel
- Diameter: 0.118"
- Interchangeable terminals
- Polypropylene case and handle with impact resistance
- Durability.
- High Flexibility
- Different models with different lengths



C-LOGIC 300SC-FTR series

Steel spiral Fish Tape






More info

ARTICLE	C-LOGIC 376SCS-FTR	C-LOGIC 320SCS-FTR
SKU	CLOGIC376SCSFTRCBINT	CLOGIC320SCSFTRCBINT
EAN	8435394777573	8435394777580
UPC	810053671894	810053671900

ARTICLE	C-LOGIC 330SCS-FTR
SKU	CLOGIC330SCSFTRCBINT
EAN	8435394777597
UPC	810053671917

SPECIFICATIONS



Ref. Name	Length	Diameter	Tensile Strength	Terminals
C-Logic 376SC-FTR	7.6 m 24.93 ft	3 mm 0.118"	4000 kg 8818.49 lb	Interchangeables
C-Logic 320SC-FTR	20 m 65.6 ft	3 mm 0.118"	4000 kg 8818.49 lb	Interchangeables
C-Logic 330SC-FTR	30 m 98.4 ft	3 mm 0.118"	4000 kg 8818.49 lb	Interchangeables

PACKAGING & LOGISTICS INFORMATION

HS Code: 82055980

Check available packaging options.


CONTENTS




MAIN APPLICATIONS



DOMESTIC

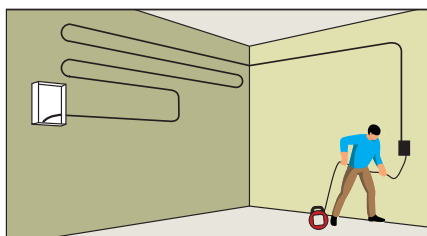

INDUSTRIAL

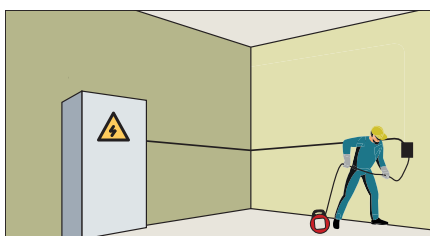



- Made on poliamide
- Diameter: 0,157"
- Interchangeable terminals
- Polypropylene case and handle with impact resistance
- Durability
- High Flexibility
- Different models with different lenghts



C-LOGIC 400N-FTR series

Spring nylon Fish Tape



More info

ARTICLE	C-LOGIC 420N-FTR	C-LOGIC 430N-FTR
SKU	CLOGIC420NFTRCBINT	CLOGIC430NFTRCBINT
EAN	8435394777603	8435394777610
UPC	810053671924	810053671931


CONTENTS




MAIN APPLICATIONS







DOMESTIC

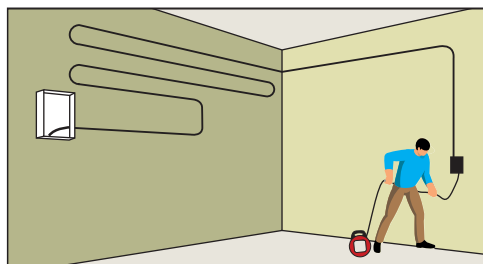

INDUSTRIAL

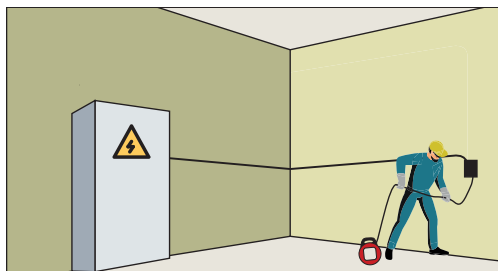

SPECIFICATIONS



Ref. Name	Length	Diameter	Tensile Strength	Terminals
C-Logic 420N-FTR	20 m 65.6 ft	4 mm 0.157"	800 kg 1763.7lb	Interchangeables
C-Logic 430N-FTR	30 m 98.4 ft	4 mm 0.157"	800 kg 1763.7lb	Interchangeables

PACKAGING & LOGISTICS INFORMATION

HS Code: 82055980

Check available packaging options.



- Made on steel
- Diameter: 0.118"x0.06"
- Interchangeable terminals
- Polypropylene case and handle with impact resistance
- Durability.
- High Flexibility






C-LOGIC 315SS-FTR series

Spring Steel Fish Tape
SKU: CLOGIC315SSSTRRCBINT
EAN Code: 8435394777566
UPC Code: 810053671887



More info

SPECIFICATIONS



Ref. Name	Length	Diameter	Tensile Strength	Terminals
C-Logic 315SS-FTR	7.6 m 24.93 ft	3 mm 0.118"	130 kg 286.6 lb	Interchangeables

PACKAGING & LOGISTICS INFORMATION

HS Code: 82055980

Check available packaging options.


CONTENTS




MAIN APPLICATIONS



DOMESTIC

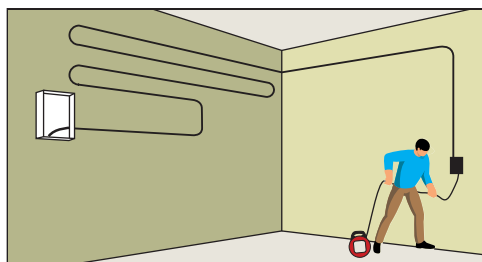

INDUSTRIAL

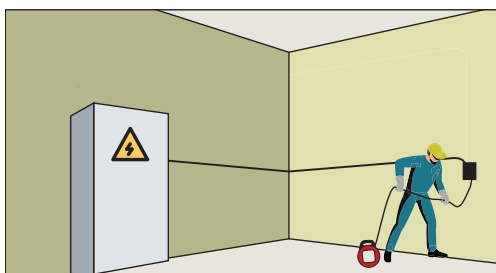



- Bicomponent gel
- Fast reticulation about 15 minutes at 68°F
- It polymerizes even with low temperatures
- Low viscosity, no-toxic, good transparency
- Re-accessible
- No expiry date



C-LOGIC 180AC-FT

Insulating gel

SKU: CLOGIC180ACFTPEINT


EAN Code: 8435394877518

UPC Code: 810053671795



More info

SPECIFICATIONS



General

Do not store below 39.2°F

Dielectric strength: 20Kv/mm

Suitable for installations until 1Kv


Protection grade provided: IP68

PACKAGING & LOGISTICS INFORMATION

HS Code: 34039900

Check available packaging options.

CONTENTS




MAIN APPLICATIONS

1




2



15-20 min

3





AMERICAS

MGL AMERICA, LLC.

US East Coast

2810 Coliseum Centre Drive, Ste. 100.
Charlotte, NC, 28217
USA
Tel: +1 833 533-5899

US West Coast

760 Challenger Street.
Brea, California, 92821
USA
Tel: +1 310-728-6220

APAC

MGL GLOBAL SOLUTIONS LTD


info.apac@mgl-intl.com
Flat 4-1, 4/F, No. 35, Section 3
Minquan East Road.
Taipei, Taiwan.
Tel: +886 2-2508-0877

EMEA

MGL EUMAN S.L.

info.emea@mgl-intl.com
Parque Empresarial Argame, 33163
Morcín, Asturias, Spain.
Tel: +34 985-08-18-70

www.mgl-intl.com



www.clogic-intl.com